



project collection

by searchlight

2026

project collection

The 2026 Project Collection is a toolkit crafted for lighting specifiers. Tailored to optimise lighting performance, it features architecturally designed solutions that align perfectly with project requirements. By seamlessly integrating technical innovation with creative vision, we deliver solutions that elevate both interior and exterior spaces.

useful information

GU10/Mini GU10 items

GU10 products are designed to fit a standard GU10 lamp length of 53mm. The specified minimum recess depth dimensions for our products are based on this standard length, ensuring clear installation guidelines. If a product is designed for a longer GU10 lamp length, this will be noted in the key features on the product page.

GU10 lamps are not included.

Mini GU10 lamps, also known as GU10 MR11, share the same lamp cap as standard GU10s. However, mini GU10 lamps have a smaller face diameter of only 35mm, making them ideal for applications requiring a smaller luminaire body.

Mini GU10 lamps are not included but can be purchased separately in a choice of CCT. See pg. 219 for more details.

Dimming

All dimmable products are compatible with mains leading and/or trailing edge dimming. We test all our dimmable products for compatibility with Varilight V-pro dimmer modules. We cannot guarantee the compatibility of other leading / trailing edge dimmers.

Lightsource/Luminaire lumens

Lightsource lumens measure the total light emitted directly from the light source, i.e. the LED PCB, without accounting for any losses due to the fixture's design. Luminaire lumens, on the other hand, measure the total light output from the complete luminaire, including any losses caused by the luminaire body, lenses, reflectors, or diffusers. When the product has a replaceable LED lightsource, the lightsource lumens are quoted on each page.

Colour Rendering Index (CRI)

All products have a minimum CRI >80. CRI>90 products are indicated on the page.


Living finishes

Living finishes change over time. Anodised finishes may appear slightly darker after a period of 3 years due to continued oxidation of the surface of the product.

Warranty

All products are manufactured and inspected in order to meet the technical and quality standards demanded by the market. These come with a standard 5-year warranty out of the box.

We understand that coastal environments can subject products to unique challenges, such as saltwater exposure and extreme weather conditions, our 5-year warranty includes all outdoor products with this icon, when used in locations up to 1km from the coast.



Scan here for further help & advice.



ceiling

24-26



ara 60cm / 100cm / 150cm

32-33



hey-lo 60cm / 90cm

38-39



vistina round

40-41



vistina long

42-43



lino 2 120cm

44



saturn 40cm / 60cm

27



ada 1m

28-29



orbit 120cm

30-31



compass 2m

34-35



eternity 55cm

36-37



prisma 35cm / 45cm

45



peri 30cm

46-47



verve 30cm / 40cm

48



andaman 30cm / 40 cm

49



banda 23 cm / 35cm

50-51



grace 30cm / 50cm

52-53



laser

54



anna pendant

55



anna ceiling

56-57



swivel / andromeda

58



artemis / apollo pendant

59



honos

recessed

62



moon recessed

63



polo

64



grid

65



grid FR 🔥

66-67



mini

68



slim trim adjustable

69



slim trim IP65 💧

70



glacier 💧

71



zelda round 💧 🔥

72



slim trim 2 FR 🔥

73



zara 💧 🔥

74-75



slim 3 💧 🔥

76-77



slim 3 trimless 💧 🔥

78




zelda round trimless 💧 🔥

79



zelda square trimless 💧 🔥

80



slim trimless IP65 💧

81



slim adjustable

82



sablons 1 & 2

83



LED wall washer

86-89




solid plaster downlights

90-91



solid plaster wall light

92-93



metal trimless wall lights

94-95



pyrenees IP65 💧

96-97



steplight / runway steplight

98-99



marker lights 💧

spot & track

102-105



moon 1, 2, 3 & 4 bronze

New

106-109



moon 1, 2, 3 & 4 back & white

110-111



selene 3 💧

112-115



anna spot

116-117



ciara spot

118-119



jupiter

120-125



track accessories

New

126-133



track heads

wall

136-137



sunrise

138-139



anna wall

140-141



anna reader

142-143



pimlico 2

144-145



victoria / reader

146



laser spot

147



laser reader

148



blackfriars

149



ciara wall

156



marlow

151



victoria LED

152-153



marylebone

154-155



kings cross

156



southwark

157



sloane 1 / 2

158-159



london bridge 10cm / 20cm / 38cm

160




vavin 6cm / 90cm / 120cm

161



venti/veritas

162-163



odeon

164



avron

165



cadet

166



concorde round

167



concorde square

table & floor

170-171



olympia

172-173



ciara

shades

176-178



shades

179



suspensions

180-181



custom shades

New

outdoor

184-185



farringdon

186



grosvenor I

187



grosvenor II

188



connaught

190



savoy / savoy plus

195



savoy / lanesborough

193



berkeley II

194-195




strand / mayfair

196-197



chiba duo / tokyo

198-199



suzuka / sapporo

200



yokhama

201



peri

202



kyoto / kobe

203



trafalgar

204-205



euston

206-207



plot

208



piccadilly

209



paddington

mirror

212



acqua

accessories

216



suspension



LED modules

217



lamps



insulation guards



constant current drivers

Scan to go straight to
our new items



families





ciara

ciara spot 116-117
ciara wall 149
ciara table & floor 172-173

For detailed drawings and specifications along with help & advice, visit www.projectcollection.co.uk



New


moon bronze

moon spotlights 102-105

moon series also available in black and white finishes



For detailed drawings and specifications along
with help & advice, visit www.projectcollection.co.uk

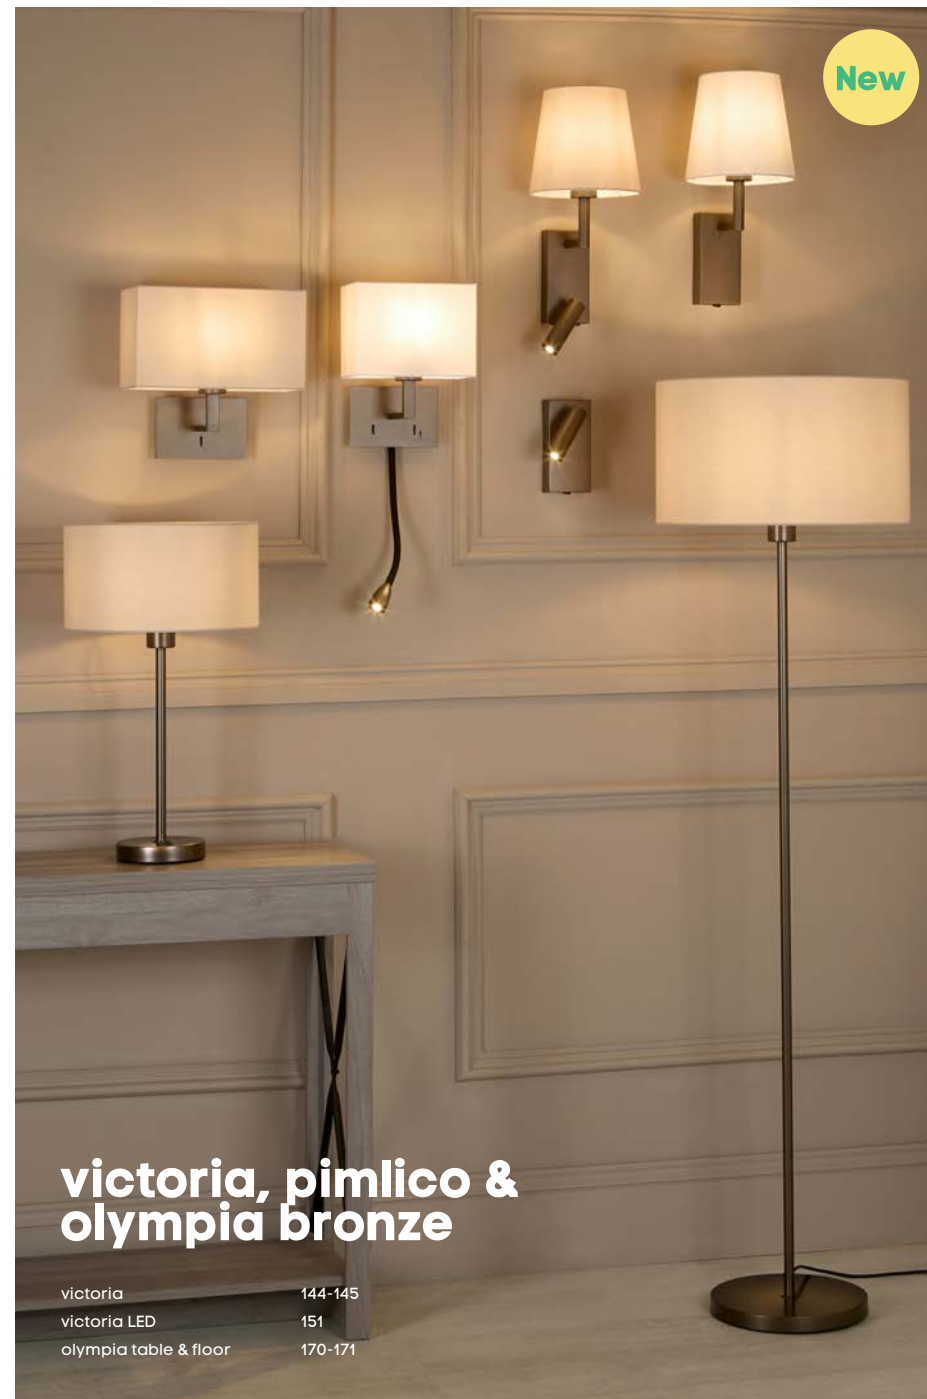

New



victoria LED recessed - Pg. 151



laser reader - Pg. 147



victoria reader - Pg. 145




anna reader - Pg. 140-141



ciara wall - Pg. 149



pimlico 2 - Pg. 142-143

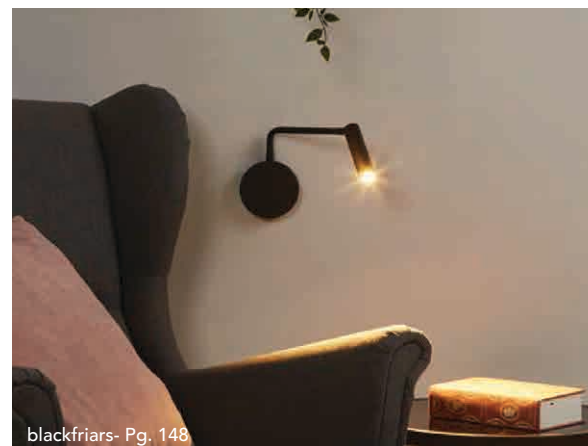


blackfriars - Pg. 148




marylebone - Pg. 152-153



victoria LED reader - Pg. 151

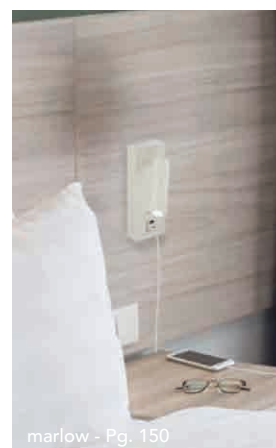

marlow - Pg. 150

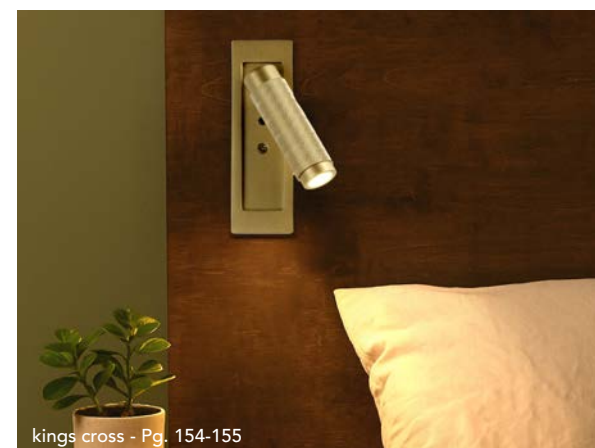

kings cross - Pg. 154-155

ceiling



For detailed drawings and specifications along
with help & advice, visit www.projectcollection.co.uk



2 CCT

PE-ARA60-B

Item Code	Power (w)	Luminaire lumens at 3000K	Luminaire lumens at 4000K
PE-ARA60-B	30	2500	2650
PE-ARA60-W	30	2800	2950
PE-ARA60-GO	30	2500	2650
PE-ARA60-BZ	30	2500	2650

Item Code	Power (w)	Luminaire lumens at 3000K	Luminaire lumens at 4000K
PE-ARA100-B	60	4300	4750
PE-ARA100-W	60	5100	5350
PE-ARA100-GO	60	4300	4750
PE-ARA100-BZ	60	4300	4750




Sand black



Sand white



Gold



Bronze

ceiling

ara 60cm


PE-ARA60-B ■
PE-ARA60-W □

PE-ARA60-GO ■
PE-ARA60-BZ ■



Key Features

Sand black / Sand white / gold /
bronze
Aluminium / Frosted acrylic
CCT Selectable 3000K / 4000K
CCT switch in ceiling can
Min. drop: 400mm

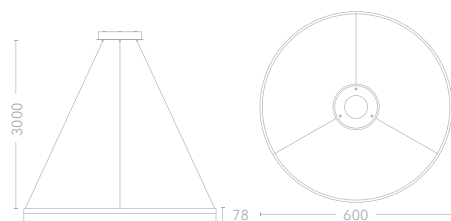

ara 100cm


PE-ARA100-B ■
PE-ARA100-W □

PE-ARA100-GO ■
PE-ARA100-BZ ■



Key Features

Sand black / Sand white / gold /
bronze
Aluminium / Frosted acrylic
CCT Selectable 3000K / 4000K
CCT switch in ceiling can
Min. drop: 500mm

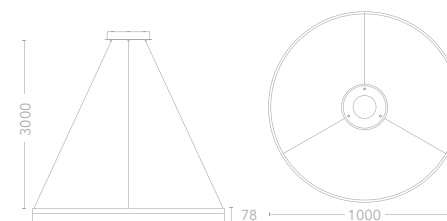




Item Code	Power (W)	Luminaire lumens at 3000K	Luminaire lumens at 4000K
PE-ARA150-B	99	6200	6700
PE-ARA150-W	99	7800	8300
PE-ARA150-GO	99	6200	6700
PE-ARA150-BZ	99	6200	6700

ara 150cm


PE-ARA150-B ■
PE-ARA150-W □

PE-ARA150-GO ■
PE-ARA150-BZ ■

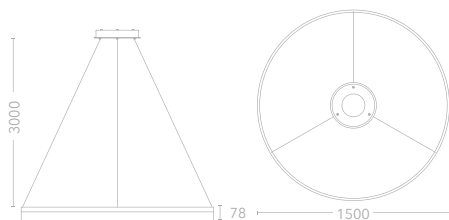

Key Features

Sand black / Sand white / gold
/ bronze
Aluminium / Frosted acrylic
CCT Selectable 3000K / 4000K
CCT switch in ceiling can
Min. drop: 700mm

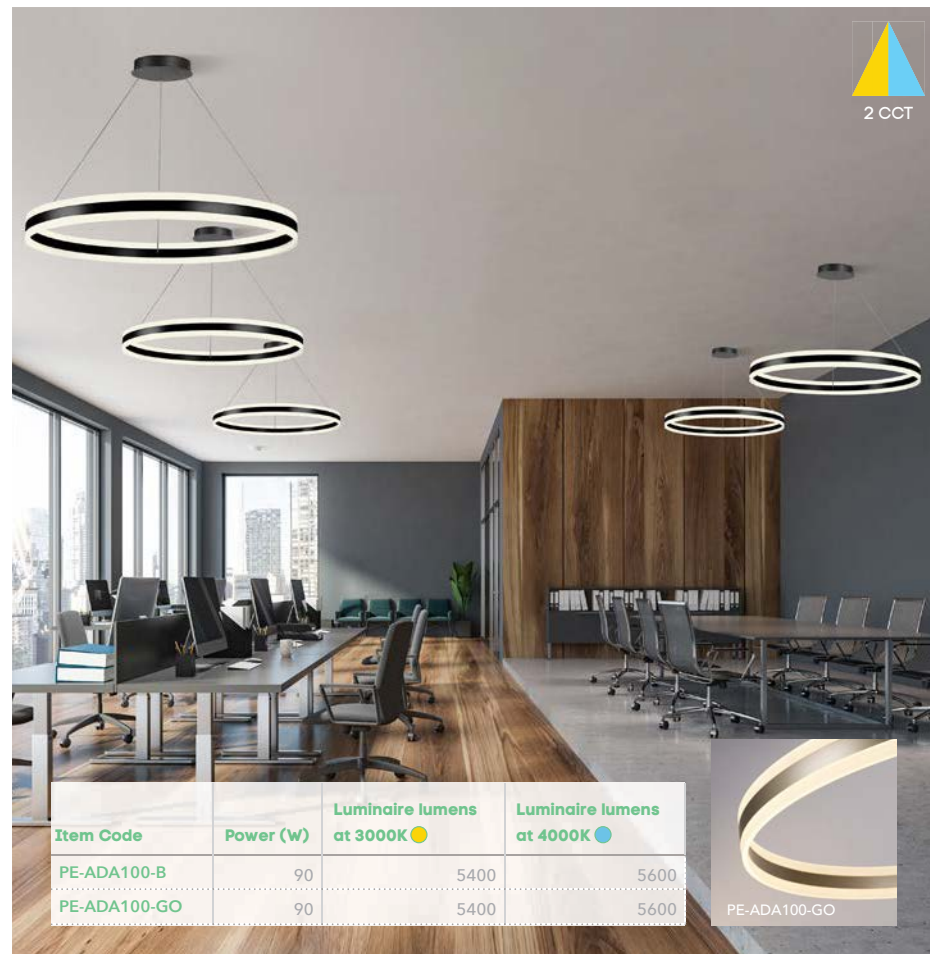


Item Code	Power (W)	Luminaire lumens at 3000K	Luminaire lumens at 4000K
PE-ADA100-B	90	5400	5600
PE-ADA100-GO	90	5400	5600



ada 100cm

PE-ADA100-B ■
PE-ADA100-GO ■

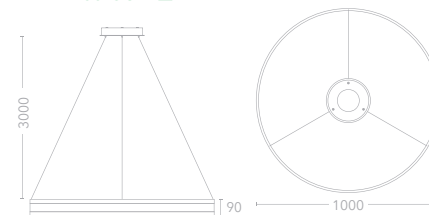

Key Features

Sand black / Matt gold
Aluminium / Acrylic
CCT Selectable 3000K / 4000K
CCT switch in ceiling can
Min. drop: 500mm



2 CCT



PE-ORB120-BZ

Item Code	Power (W)	Luminaire lumens	
		at 3000K ●	at 4000K ●
PE-ORB120-BS	69	2950	3100
PE-ORB120-WS	69	3800	4100
PE-ORB120-GO	69	2950	3100
PE-ORB120-BZ	69	2950	3100



PE-ORB120-WS



PE-ORB120-BS



PE-ORB120-BZ

illuminated
inside ring



PE-ORB120-GO

orbit 120cm



PE-ORB120-BS ■
PE-ORB120-WS □

PE-ORB120-BZ ■
PE-ORB120-GO ■



Key Features

Sand black / Sand white / Matt
bronze / Matt gold
Aluminium / Silicone diffuser
CCT Selectable 3000K / 4000K
CCT switch in ceiling can
Min. drop: 900mm



ceiling



PE-COM2-WS



PE-COM2-BS



PE-COM2-WS

Direct (downwards)
illumination

compass 2m


PE-COM2-BS ■
PE-COM2-WS □



CLASS 1 2CCT

Key Features

Sand black / Sand white
Aluminium / Opal polycarbonate
CCT Selectable 3000K / 4000K
CCT switch in ceiling can
102W SMD LED
Min. drop: 900mm
On site assembly from four
sections

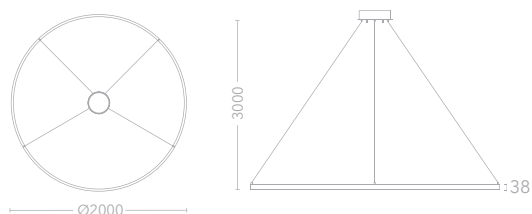

Item Code	Power (W)	Luminaire lumens at 3000K ●	Luminaire lumens at 4000K ●
PE-COM2-BS	102	4300	4800
PE-COM2-WS	102	5500	6000



Item Code	Power (W)	Lightsource lumens at 3000K	Lightsource lumens at 4000K
CE-HEY60	60	7750	7850
CE-HEY90	84	10,600	10,800



CE-HEY60-W



CE-HEY90-B



CE-HEY90-B



CE-HEY90-W



PA-HEY-B



hey-lo surface 60cm


CE-HEY60-B ☒
CE-HEY60-W ☐

2m suspension kit

PA-HEY-B ☒
PA-HEY-W ☐

hey-lo surface 90cm

CE-HEY90-B ☒
CE-HEY90-W ☐



Key Features


Sand black / Sand white
Aluminium / Polycarbonate
CCT Selectable 3000K / 4000K
CCT switch in backplate
Replaceable LED
CRI>90



Item Code	Power (W)	Luminaire lumens at 3000K	Luminaire lumens at 4000K
FL-ETE55-WS	39	2900	3100


eternity 55cm surface

FL-ETE55-WS



Key Features

Sand white
Aluminium / Polycarbonate
CCT Selectable 3000K / 4000K
CCT switch in ceiling can

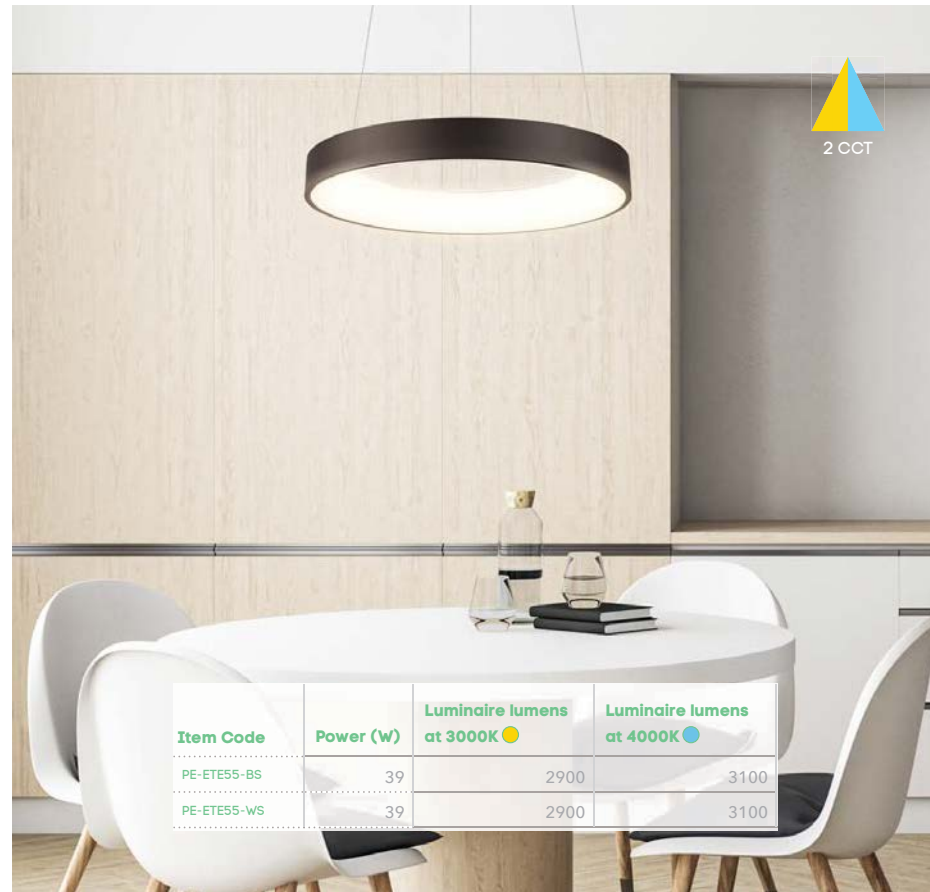


Item Code	Power (W)	Luminaire lumens at 3000K	Luminaire lumens at 4000K
PE-ETE55-BS	39	2900	3100
PE-ETE55-WS	39	2900	3100




eternity 55cm suspension

PE-ETE55-WS
PE-ETE55-BS

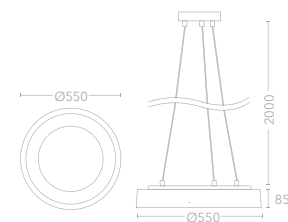

Key Features

Sand black / Sand white
Aluminium / Polycarbonate
CCT Selectable 3000K / 4000K
CCT switch in ceiling can
Min. drop: 450mm

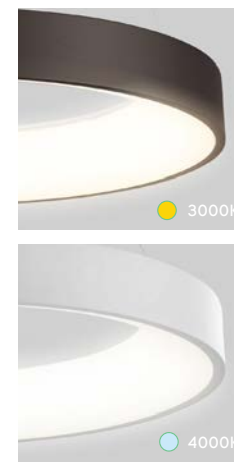




CE-PRI35-GO



CE-PRI45-B

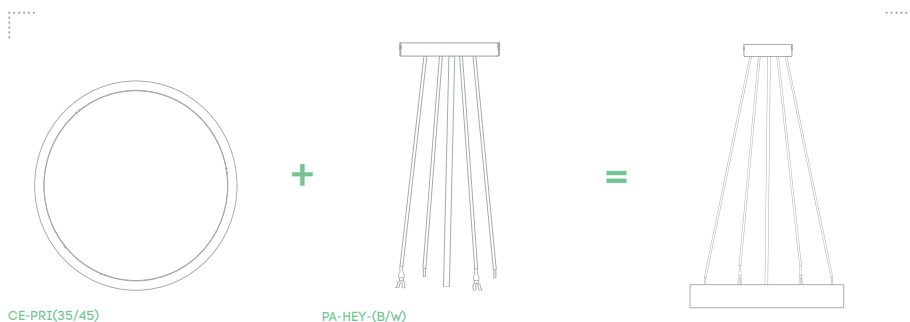

Item Code	Power (W)	Lightsource lumens at 3000K ●	Lightsource lumens at 4000K ●
CE-PRI35	36	3600	3750
CE-PRI45	42	4300	4400

prisma 35cm

CE-PRI35-B ■
CE-PRI35-GO ■


prisma 45cm

CE-PRI45-B ■
CE-PRI45-GO ■

2m suspension kit

PA-HEY-B ■
PA-HEY-W □

Suspension also compatible with prisma, see pg. P30 & P31



Key Features

Sand black / Matt gold
Die cast aluminium /
Microprismatic diffuser
CCT Selectable 3000K / 4000K
CCT Switch in backplate
Replaceable LED
CRI > 92

CE-PRI45-B + PA-HEY-B



microprismatic diffuser



● 3000K



● 4000K

ceiling



2 CCT



2 CCT





PE-VISTR-B

Item Code	Power (W)	Luminaire lumens at 3000K ●	Luminaire lumens at 4000K ●
PE-VISTR-B	42	4300	4550
PE-VISTR-W	42	4650	4900



PE-VISTR-W

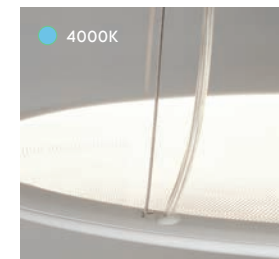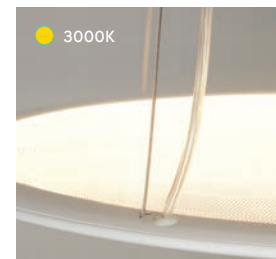

Transformative optic


ceiling

vistina round

PE-VISTR-B ■▲

PE-VISTR-W □▲

Transformative optic
(clear when off, opaque when on)

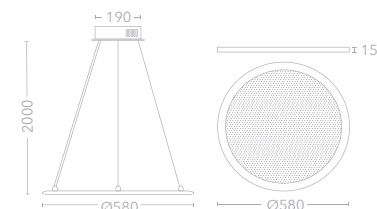

Key Features

Sand black / Sand white

Aluminium / Acrylic

Transformative optic

CCT Selectable 3000K / 4000K

CCT switch in ceiling can

60% direct, 40% indirect


Min. drop: 400mm



PE-VIST-W




PE-VIST-W

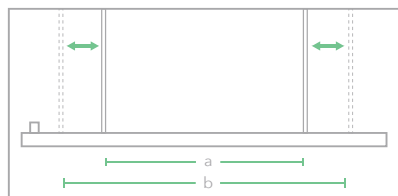

Adjustable suspension spacing

Min. suspension spacing (a) : 720mm
Max. suspension spacing (b) : 1020mm


Item Code	Power (W)	Luminaire lumens at 3000K ●	Luminaire lumens at 4000K ●
PE-VIST-B	50	4750	5100
PE-VIST-W	50	5250	5700

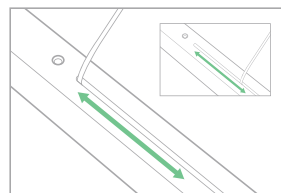

vistina long

PE-VIST-B ■ ▲
PE-VIST-W □ ▲

Transformative optic
(clear when off, opaque
when on)

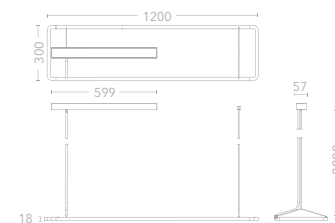

Key Features

Sand black / Sand white
Aluminium / Acrylic
Transformative optic
CCT Selectable 3000K / 4000K
CCT switch in ceiling can
60% direct, 40% indirect
Min. drop: 300mm



CE-LINO2-B




CE-LINO2-W



CE-LINO2-B

lino 2 surface / pendant

CE-LINO2-B ■
CE-LINO2-W □

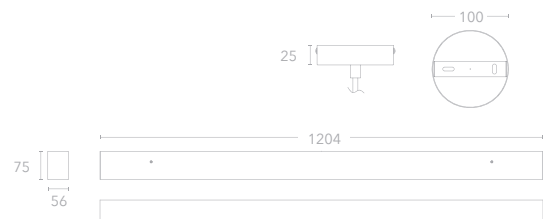

Key Features

Sand black / Sand white
Aluminium / Polycarbonate
CCT Selectable 3000K / 4000K
CCT switch inside fitting
Min. drop: 150mm
Includes surface mounting kit and
pendant suspension kit



2 CCT

ceiling




Item Code	Power (w)	Lightsource lumens at 3000K ●	Lightsource lumens at 4000K ●
CE-LINO2-B	37	3700	3800
CE-LINO2-W	37	3700	3800



Item Code	Power (W)	Luminaire lumens at 3000K	Luminaire lumens at 4000K
FL-SAT40-WS	40	3000	3100
FL-SAT60-WS	53	3600	3800


saturn 40cm

FL-SAT40-WS

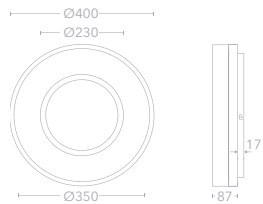

saturn 60cm

FL-SAT60-WS

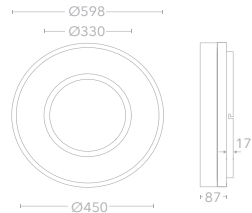


Key Features

Sand white & Frosted acrylic
CCT Selectable 3000K / 4000K
CCT switch inside body
Ceiling or wall mounted

For detailed drawings and specifications along with help & advice, visit www.projectcollection.co.uk




Item Code	CE-PERI30
Lightsource lumens at 3000K	2550
Lightsource lumens at 4000K	2750
Lightsource lumens at 5000K	2700

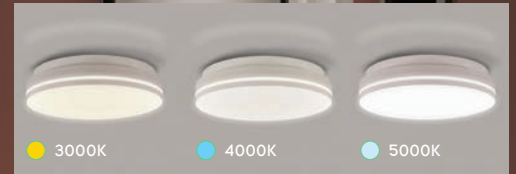

peri 30cm IP54

CE-PERI30
17W SMD LED



Rear and side cable entry



Key Features

White
Polycarbonate
CCT Selectable
3000K / 4000K / 5000K
CCT switch in body
Suitable for outdoor use
Replaceable LED
Rear and side cable entry
Ceiling or wall mounted



verve 30cm IP44

CE-VER30-B ☒
CE-VER30-W ☐


2m suspension kit IP20

PA-VER-B ☒
PA-VER-W ☐

Add PA-VER to suspend from
200mm up to 2000mm


verve 40cm IP44

CE-VER40-B ☒
CE-VER40-W ☐




Key Features

Sand black / Sand white
Aluminium / PC diffuser
CRI > 88 / CCT Selectable
3000K / 4000K / 5700K
CCT switch on back of fitting
Replaceable LED lightsource
Rear and side cable entry
Ceiling or wall mounted

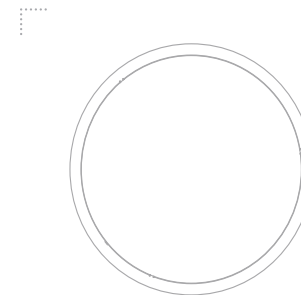



CE-VER(30/40)

+

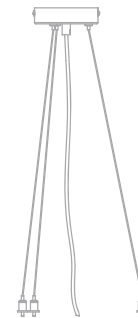

PA-VER

=

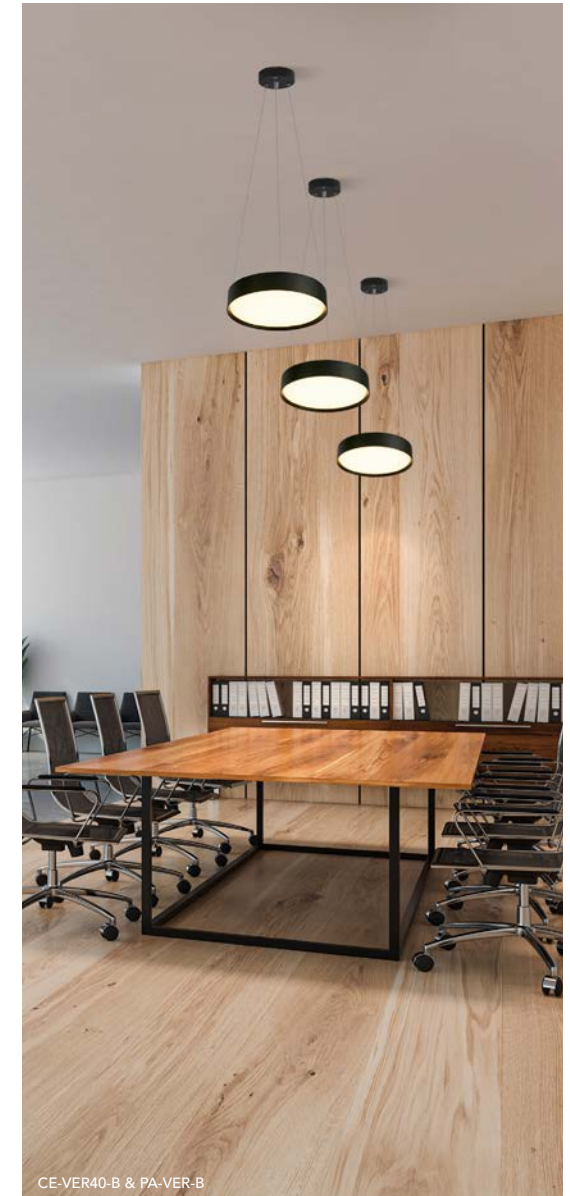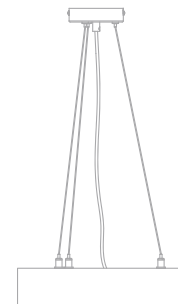


ceiling

Item Code	Power (W)	Lightsource lumens at 3000K	Lightsource lumens at 4000K	Lightsource lumens at 5700K
CE-VER30	16	2700	2850	2750
CE-VER40	23	3300	3550	3450




andaman 30cm IP44

FL-ADM30-W  
14W SMD LED
Lightsource lumens: 1100



andaman 40cm IP44

FL-ADM40-W  
25W SMD LED
Lightsource lumens: 1950




Key Features

Clear glass / Matt white inner glass
Glass / Steel
3000K
Ceiling or wall mounted


banda 23cm IP44

FL-BAN23-B  
14W SMD LED
Lightsource lumens: 950



banda 35cm IP44

FL-BAN35-B  
27W SMD LED
Lightsource lumens: 1800



Key Features

Matt white glass / Black
Glass / Steel
3000K
Ceiling or wall mounted



Item Code	Power (W)	Lightsource lumens at 3000K ●	Lightsource lumens at 4000K ●
FL-GRA30	17	1300	1800
FL-GRA50	36	3300	3500



grace 30cm

- FL-GRA30-B ■
- FL-GRA30-GO ■



grace 50cm

- FL-GRA50-B ■
- FL-GRA50-GO ■



Key Features

- Sand black / Matt gold
- Metal / Rigid polystyrene
- CCT Selectable 3000K / 4000K
- CCT Switch inside the fitting
- Replaceable LED






PE-LAS6-W



laser suspension

PE-LAS6-W ☐
6 x GU10

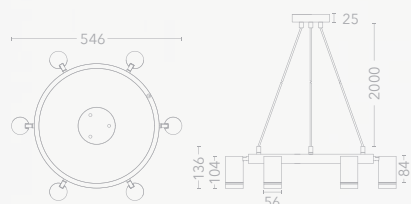

Key Features

Sand white
Aluminium / Frosted diffuser
GU10 max. 10W
Min. drop: 500mm
90° pivot, 350° rotation
Heads independently
adjustable



ceiling

See pages below for the rest
of the laser family:

laser GU10 track	131
laser spot	146
laser reader	147



PE-ANN-B

PE-ANN-W



PE-ANN-GO



PE-ANN-BZ




anna pendant

- PE-ANN-BZ ■
- PE-ANN-GO ■
- PE-ANN-B ■
- PE-ANN-W □



Compatible with
pendant track adapter

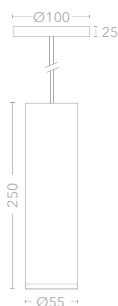

Key Features

Anodised bronze* / Anodised
gold* / Sand black / Sand white
Aluminium
GU10 max. 10W
Max. drop: 2m
*Living finishes



CE-ANN-BZ

CE-ANN-GO

CE-ANN-B

CE-ANN-W

anna ceiling

- CE-ANN-BZ ■
- CE-ANN-GO ■
- CE-ANN-B ■
- CE-ANN-W □



Key Features

Anodised bronze* / Anodised
gold* / Sand black / Sand white
Aluminium
GU10 max. 10W
*Living finishes

ceiling



CE-AND-B



CE-SWI-B



CE-SWI-B



CE-SWI-W



andromeda ceiling



ANTI-GLARE

CE-AND-B ■ ▲
90° pivot, 350° rotation

swivel

CE-SWI-B ■
CE-SWI-W □
Simultaneous 90°
pivot and rotation




CLASS 2



DIMMABLE

Key Features


Sand black / Sand white
Aluminium
GU10 max. 10W

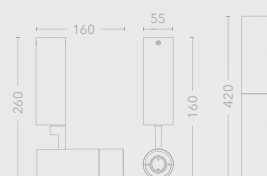




artemis GU10 pendant

PE-ART-B ■
PE-ART-W □

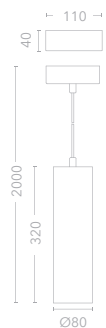


apollo GU10 pendant

PE-APO-B ■
PE-APO-W □

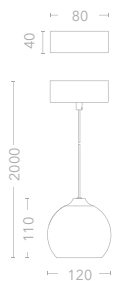

Key Features

Sand black / Sand white
Steel
GU10 max. 10W
Min. drop: 200mm
Compatible with pendant track
adapter



CE-HONRB

CE-HONSQW



CE-HONRB




CE-HONSQW

ceiling

honos round adjustable

CE-HONRB ■
CE-HONRW □
1 x GU10



honos square adjustable

CE-HONSQB ■▲
CE-HONSQW □▲
1 x GU10



Key Features

Sand black / Sand white
Aluminium
GU10 max. 10W
20° pivot, 360° rotation

recessed





SP-MOOR-B



SP-MOOR-W



SP-MOOR-B


moon recessed

SP-MOOR-B ■
SP-MOOR-W □



CUT OUT
60-85mm

MIN DEPTH
60mm

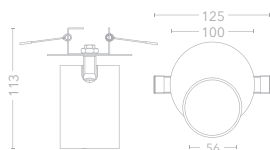

CLASS 2 DIMMABLE

Key Features

Sand white or Sand black
GU10 Max. 10W
350° Rotation
90° Pivot
Ideal for retrofit : Suitable for
installation into downlight holes
from Ø60 to Ø85mm



PL-POLW



DL-POLW



PL-POLW




polo

DL-POLW □ ▲



CUT OUT
92mm

MIN DEPTH
135mm



polo trimless


PL-POLW □ ▲



CUT OUT
92mm

MIN DEPTH
135mm

Ceiling must be skimmed
after installation



CLASS 2 DIMMABLE

Key Features

Sand white
Aluminium
GU10 Max. 10W
90° pivot, 350° rotation
Use in any position from fully
recessed to fully extended
Distance to front of lamp : 12mm



recessed



DL-GRID2WW




DL-GRID1WB



DL-GRID1BB


grid 1

DL-GRID1WW ☐
DL-GRID1WB ☒ ☒
DL-GRID1BB ☒



grid 2

DL-GRID2WW ☐
DL-GRID2WB ☒ ☒
DL-GRID2BB ☒



CLASS 2 DIMMABLE

Key Features

Matt white / Matt white & black /

Matt black

Aluminium


GU10 Max. 10W

15° tilt, 360° rotation

Distance to front of lamp: 30mm

grid 1 FR

DL-GRID1FRWW ☐



grid 2 FR

DL-GRID2FRWW ☐
DL-GRID2FRWB ☒ ☒
DL-GRID2FRBB ☒



CLASS 1 DIMMABLE FIRE-RATED 30/60/90

Key Features

Matt white / Matt white & black /

Matt black

Steel

GU10 Max. 10W

15° tilt, 360° rotation

Distance to front of lamp: 30mm



Size comparison:
PL-SLIMW (left) vs PL-MINW (right)
See pg. 81 for PL-SLIMW



See pg. 217 for dimmable Mini
GU10 lamp, available in 2700K,
3000K and 4000K

What is a
mini GU10?



DL-MINW



PL-MINW



PL-MINW

mini

DL-MINW ☐




mini trimless

PL-MINW ☐



Ceiling must be skimmed
after installation



Key Features

Sand white

Aluminium

Mini GU10 lamp (MR11)

max. 5W

30° tilt, 360° rotation

Distance to front of lamp: 30mm



DL-SLIMW



DL-SLIMB

DL-SLIMW



DL-SLIMSQB



DL-SLIMSQB

slim trim adjustable

DL-SLIMB ■
DL-SLIMW □



CUT OUT 84mm
MIN DEPTH 145mm




slim trim square adjustable

DL-SLIMSQB ■▲



CUT OUT 84 x 84mm
MIN DEPTH 135mm



CLASS 2 DIMMABLE

Key Features

Matt black / Matt white
Aluminium
GU10 Max. 10W
45° tilt
Distance to front of lamp: 32mm



DL-SLIMIPW



DL-SLIMIPB

DL-SLIMIPW

slim trim IP65

DL-SLIMIPB ■
DL-SLIMIPW □



CUT OUT 70mm
MIN DEPTH 135mm



CLASS 2 DIMMABLE IP65


Key Features

Matt black / Matt white
Aluminium
GU10 Max. 10W
Lamp change from the front,
mounting sleeve remains in the
ceiling
Distance to front of lamp: 27mm



glacier round IP65

DL-GLAR

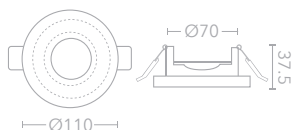


Key Features

Acrylic & Polished chrome
GU10 Max. 10W

zelda round IP65 FR

DL-ZELRB
DL-ZELRW

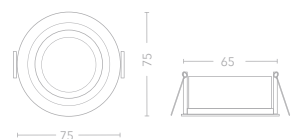

Key Features

Sand white / Sand black
Steel & Glass
GU10 Max. 10W
Quick-fit connectors
Use with insulation guard DL-IG02
pg. 217
Lamp change from the front
Suitable for bathroom zones 1 & 2
Distance to front of lamp: 20mm




Quick fit terminals for
easy installation



DL-SLIM2FRW 🔥



DL-SLIM2FRW 🔥

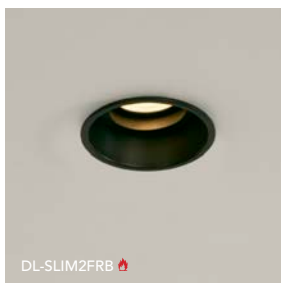


DL-SLIM2FRB 🔥

slim trim 2 FR adjustable 🔥

DL-SLIM2FRB ■
DL-SLIM2FRW □

CUT OUT 80mm
MIN DEPTH 140mm



Quick fit terminals for easy installation

CLASS 2 DIMMABLE FIRE-RATED 30/60/90

Key Features

Sand white / Sand black
Steel & Glass
GU10 Max. 10W
30° tilt
Use with insulation guard DL-IG02
pg. 217
Lamp change from the front
Distance to front of lamp: 35mm



DL-ZAR-W



DL-ZAR-W 🔥




DL-ZAR-W 🔥

zara IP65 FR adjustable 🔥

New

DL-ZAR-W □

CUT OUT 80mm
MIN DEPTH 140mm



Quick fit terminals for easy installation

CLASS 2 DIMMABLE IP65 FIRE-RATED 30/60/90

Key Features

Sand white
Steel & Glass
GU10 Max. 10W
25° tilt
Use with insulation guard DL-IG02
pg. 217
Lamp change from the front
Distance to front of lamp: 20mm



New



New

DL-SLIM3FRBZ



New

DL-SLIM3FRW





DL-SLIM3FRB

slim trim 3 adjustable

New

- DL-SLIM3FRBZ ■
- DL-SLIM3FRB ■
- DL-SLIM3FRW □



Quick fit terminals for easy installation



Key Features

- Matt bronze / Matt black / Matt white
- Steel & Glass
- GU10 Max. 10W
- 30° tilt
- Use with insulation guard DL-IG02
- pg. 217
- Lamp change from the front
- Distance to front of lamp: 45mm



New

DL-SLIMIP3FRBZ




New

DL-SLIMIP3FRB



New

DL-SLIMIP3FRW

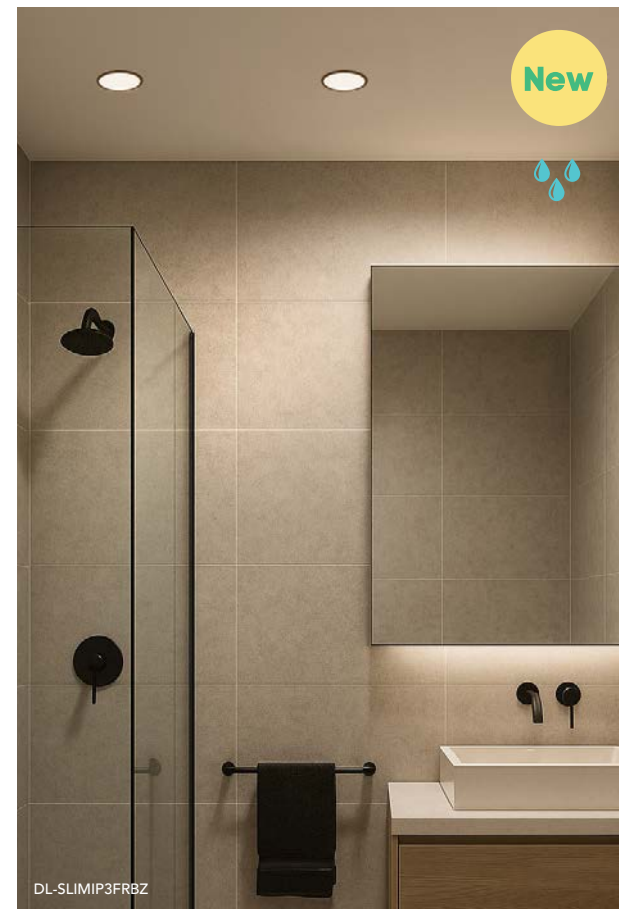



New

DL-SLIMIP3FRBZ

slim trim 3 IP65

New

- DL-SLIMIP3FRBZ ■
- DL-SLIMIP3FRB ■
- DL-SLIMIP3FRW □



Quick fit terminals for easy installation



Key Features

- Matt bronze / Matt black / Matt white
- Steel & Glass
- GU10 Max. 10W
- Use with insulation guard DL-IG02
- pg. 217
- Lamp change from the front
- Distance to front of lamp: 40mm



PL-SLIM3FRW

New



PL-SLIM3FRW

New



PL-SLIM3FRB

New



PL-SLIMIP3FRW

New



PL-SLIMIP3FRB

New



PL-SLIMIP3FRW

New


slim trimless 3
adjustable

New

PL-SLIM3FRB ■
PL-SLIM3FRW □

CUT OUT
90mm

MIN DEPTH
140mm



Quick fit terminals for
easy installation



CLASS 2 DIMMABLE

Key Features

Matt black / Matt white
Steel & Glass
GU10 Max. 10W
Use with insulation guard DL-IG01
pg. 217
Lamp change from the front
Distance to front of lamp: 45 mm



slim trimless 3
IP65

New

PL-SLIMIP3FRB ■
PL-SLIMIP3FRW □

CUT OUT
90mm

MIN DEPTH
140mm



Quick fit terminals for
easy installation



CLASS 2 DIMMABLE IP65

Key Features


Matt black / Matt white
Steel & Glass
GU10 LED Max. 10W
Use with insulation guard DL-IG01
pg. 217
Lamp change from the front
Suitable for bathroom zones 1 & 2
Distance to front of lamp: 40 mm



zelda trimless round IP65 FR

PL-ZELRB ■
PL-ZELRW □

CUT OUT
78mm
MIN DEPTH
135mm

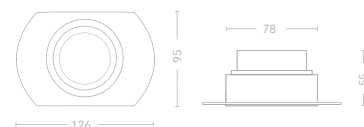

Quick fit terminals for
easy installation

CLASS 2 DIMMABLE IP65 FIRE-RATED
30/60/90

Key Features

Sand black / Sand white
Steel & Glass
GU10 Max. 10W
Use with insulation guard DL-IG01
pg. 217
Lamp change from the front
Suitable for bathroom zones 1 & 2
Distance to front of lamp: 45 mm




PL-ZELSOW PL-ZELSQB



zelda trimless square IP65 FR

PL-ZELSQB ■
PL-ZELSOW □

CUT OUT
80x80mm
MIN DEPTH
135mm

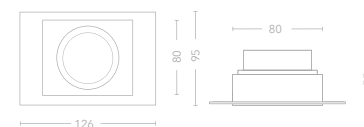

Quick fit terminals for
easy installation

CLASS 2 DIMMABLE IP65 FIRE-RATED
30/60/90


Key Features

Sand black / Sand white
Steel & Glass
GU10 Max. 10W
Use with insulation guard DL-IG01
pg. 217
Lamp change from the front
Suitable for bathroom zones 1 & 2
Distance to front of lamp: 45 mm

recessed



PL-SLIMIPW

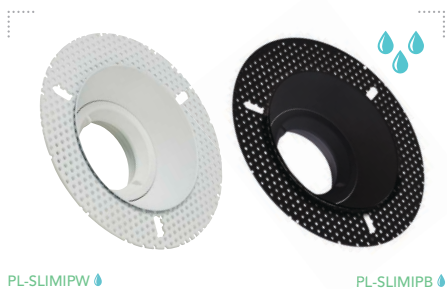

PL-SLIMIPW


PL-SLIMIPB



PL-SLIMIPW


slim trimless IP65

PL-SLIMIPB ■
PL-SLIMIPW □

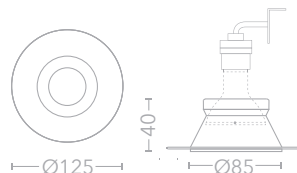


Key Features

Sand black / Sand white
Aluminium
GU10 Max. 10W
Quick fit connectors
Ceiling must be skimmed after
installation
Distance to front of lamp: 30mm

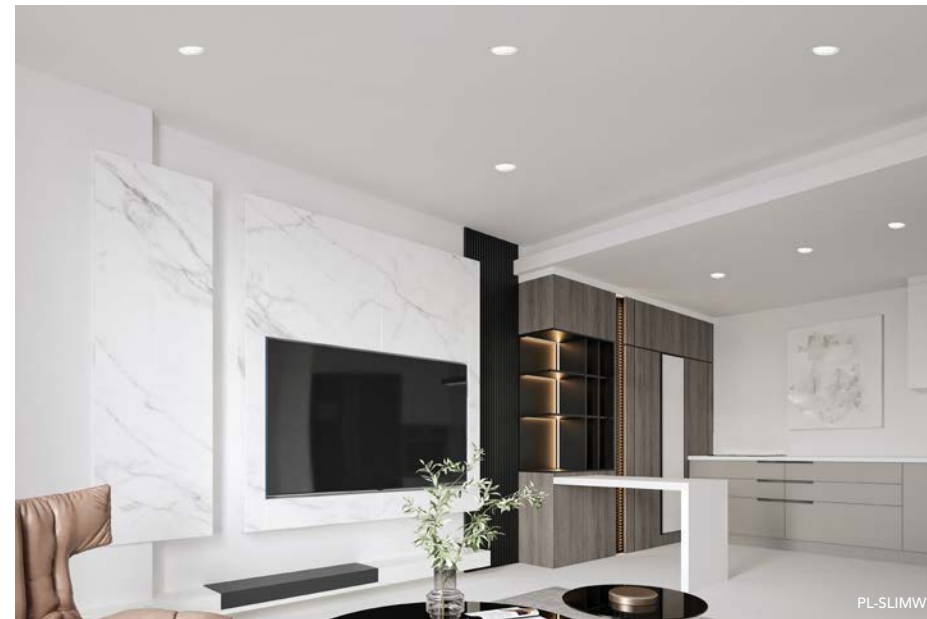

PL-SLIMW

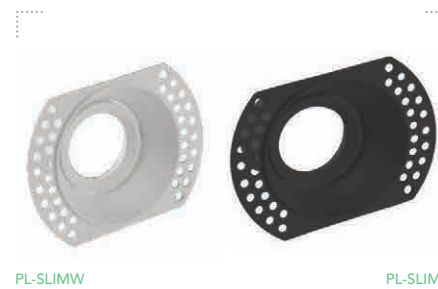

PL-SLIMW

PL-SLIMB



PL-SLIMW

slim trimless adjustable

PL-SLIMB ■
PL-SLIMW □
20° tilt




Key Features

Sand black / Sand white
Aluminium
GU10 Max. 10W
Quick fit connectors
Ceiling must be skimmed after
installation
Distance to front of lamp: 30mm




sablons 1 trimless

PL-SAB1-B ■ ▲
PL-SAB1-W □ ▲



sablons 2 trimless

PL-SAB2-B ■ ▲
PL-SAB2-W □ ▲

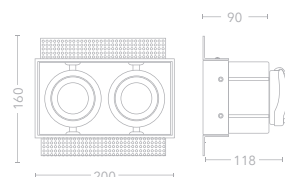

Key Features

Sand black / Sand white
Aluminium
GU10 Max. 10W LED only
45° gimbal
Ceiling must be skimmed after
installation
Distance to front of lamp: 17mm




DL-WASH



DL-WASH

LED wall washer

DL-WASH □ ▲
Luminaire lumens: 650

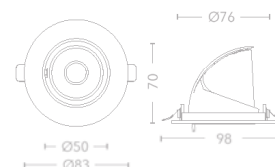

Key Features



Sand white
Aluminium
3000K
9W COB LED
40° tilt, 350° rotation
Mains dimmable driver included
Tilt angle locked by screw if
required

Use solid plaster trimless lighting when ...

you have an already plastered wall or ceiling, and you're not planning to skim the surface again.

After the product installed it is a decorator's job to infill the gap with a flexible filler / caulk, sand to a smooth finish and paint the surface of the ceiling, including the interior of the fitting.

installing solid plaster trimless lighting

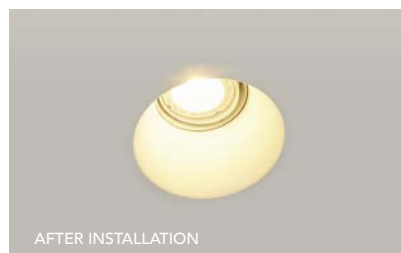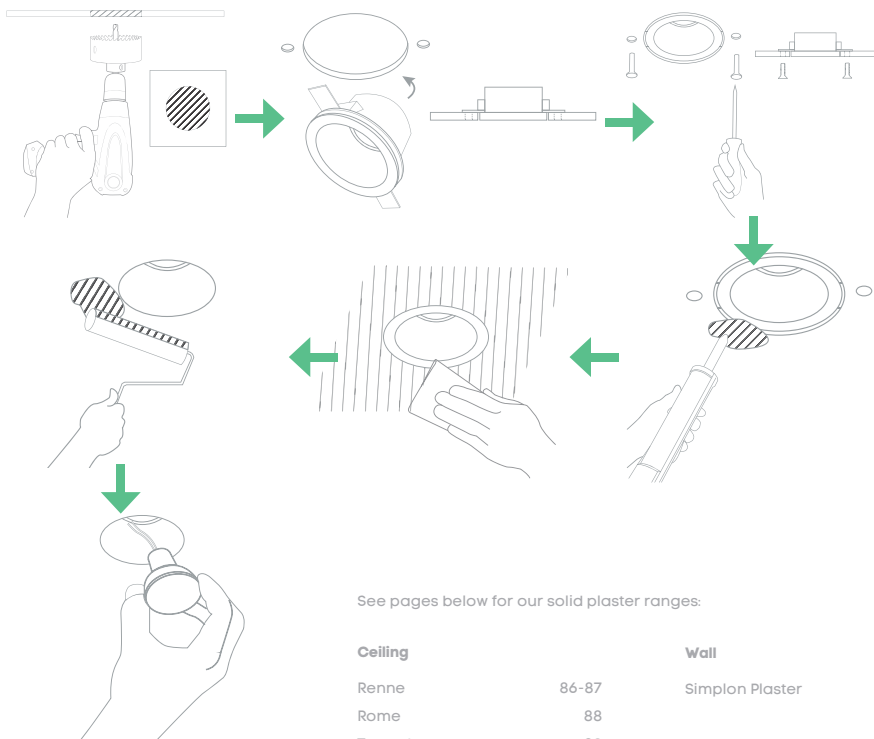



For detailed drawings and specifications along with help & advice, visit www.projectcollection.co.uk

Use metal trimless lighting when ...

you are installing into a wall or ceiling that has yet to be skimmed, or will be reskimmed.

After the metal frame is installed in the wall or ceiling the plasterer skims the surface with a 3mm layer of plaster skim. The frames have a 3mm lip for the plasterer to skim up to.

installing metal frame trimless lighting

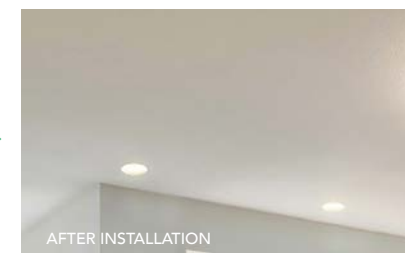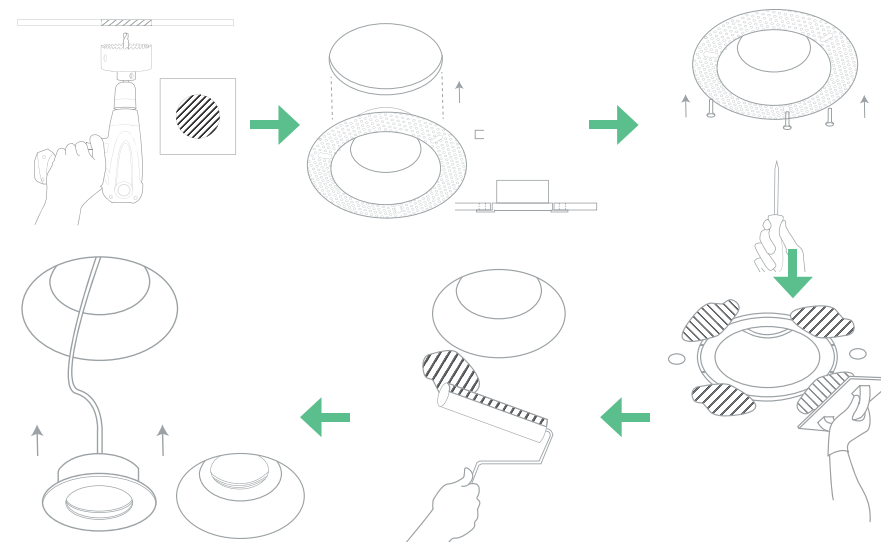



PL-REN1




PL-REN1



Retaining clip

renne

PL-REN1 



Key Features

White plaster

GU10, max. 10W

How to fit guide - see website


If skimming the ceiling, complete this before installing



This symbol represents a white plaster finish



PL-RENWW

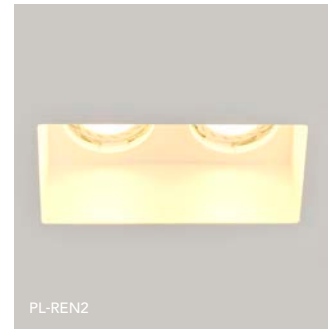


PL-REN2



PL-RENWW


renne twin

PL-REN2 



renne wall washer

PL-RENWW 



Key Features

White plaster

GU10, max. 10W

Anti-glare

How to fit guide - see website

If skimming the ceiling, complete this before installing



This symbol represents a white plaster finish

recessed



PL-ROM2



PL-ROM1 / PL-ROM2




PL-ROM2

rome

PL-ROM1 



CUT OUT
136x136mm




rome 2

PL-ROM2 




CUT OUT
136x252mm

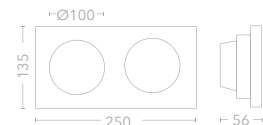

Key Features

White plaster
GU10 Max. 10W
Adjustable tabs for varying ceiling
thicknesses
How to fit guide - see website
If skimming the ceiling, complete
this before installing

 This symbol represents a white plaster finish

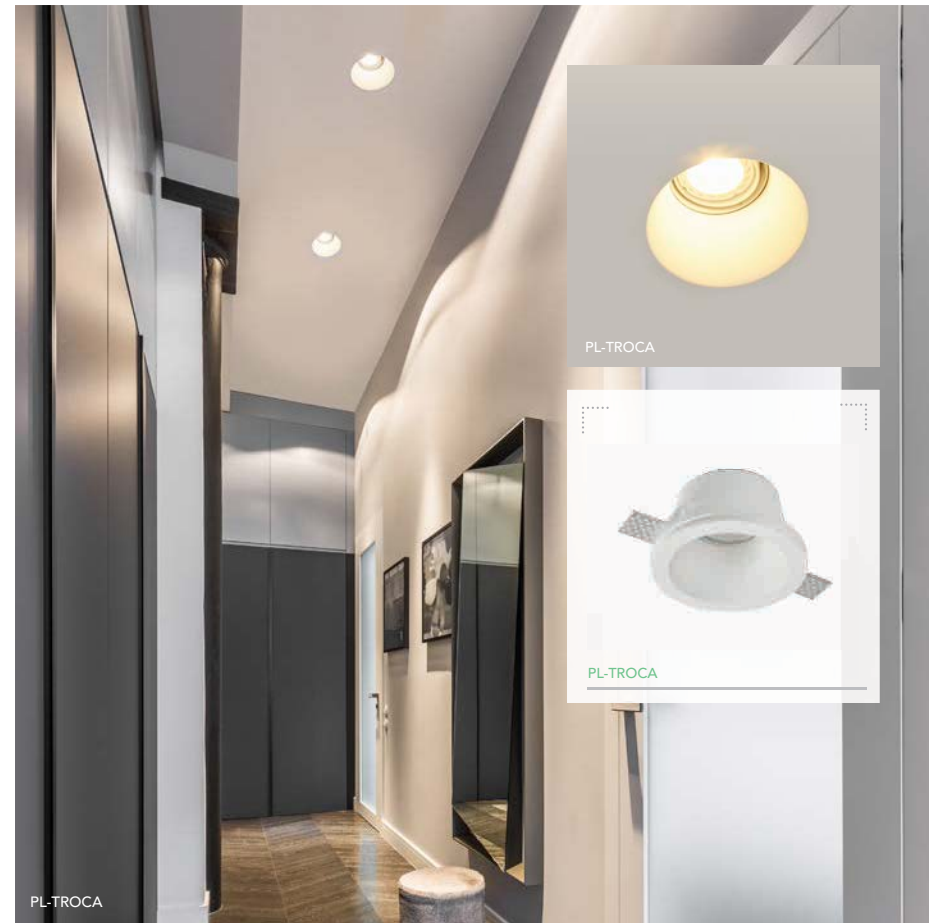

PL-TROCA



PL-TROCA



PL-TROCA


trocadero adjustable

PL-TROCA 

Tilt angle: 40°



CUT OUT
158mm



Key Features

White plaster
GU10 Max. 10W
How to fit guide - see website
If skimming the ceiling, complete
this before installing

 This symbol represents a white plaster finish

recessed



simplon plaster


Item no.	Finish	Power	CCT	Lumens	Dimmable	Replaceable LED module
PL-SIMPL ▲	White plaster	350mA	3000K ●	60	Dimmable*	MOD1W

* Dimmable when used with a dimmable driver

simplon plaster

PL-SIMPL ■

1W CREE XPE Power LED
95 lumens / 30° beam angle



Opening size h.165 x w.45mm




Key Features

White plaster
Driver supplied separately, pg.217
Dimmable when used with a dimmable driver
Not suitable for use in solid walls
How to fit guide - see website
If skimming the wall, complete this before installing
Suitable for plasterboard thickness 9-15mm



blanche GU10

PL-BLAGU10 ■



Key Features

Matt white
Steel
1 x GU10 Max.10W
Not suitable for use in solid walls
Wall must be skimmed after installation



PL-BOU



PL-BOU



PL-BOU27



PL-BOU

boulogne LED

Item no.	Finish	Power	CCT	Lumens	Dimmable	Replacement LED module
PL-BOU	White plaster 	350mA	3000K 	60	Dimmable*	MOD1W
PL-BOU27	White plaster 	350mA	2700K 	60	Dimmable*	MOD1W2700

blanche LED

Item no.	Finish	Power	CCT	Lumens	Dimmable	Replacement LED module
PL-BLA	White plaster 	350mA	3000K 	60	Dimmable*	MOD1W
PL-BLA27	White plaster 	350mA	2700K 	60	Dimmable*	MOD1W2700

*Dimmable when used with a dimmable driver



PL-BLA



PL-BLA



PL-BLA27



PL-BLA



boulogne LED

1W CREE XPE Power LED
95 lumens / 30° beam angle


CUT OUT
40x80mm

blanche LED

1W CREE XPE Power LED
95 lumens / 30° beam angle


CUT OUT
40x80mm


Key Features

Matt white / Steel
Driver supplied separately, p. 217
Dimmable when used with a
dimmable driver
Not suitable for use in solid walls
Wall must be skimmed after
installation



recessed wall



IPR-WRW

IPR-WRB

Item no.	Finish	Power	CCT	Lumens	IP Rating	Dimma-ble	Replacement LED module	Class
IPR-WRB	Black	350mA	3000K	50	65	Yes*	MOD1WIP	III
IPR-WRB-AC	Black	220 - 240V**	3000K	50	65	No	MOD1WIP230V	I
IPR-WRB27	Black	350mA	2700K	50	65	Yes*	MOD1WIP-2700	III
IPR-WRB27-AC	Black	220 - 240V**	2700K	50	65	No	MOD1WIP230V-2700	I
IPR-WRW	White	350mA	3000K	95	65	Yes*	MOD1WIP	III
IPR-WRW-AC	White	220 - 240V**	3000K	95	65	No	MOD1WIP230V	I
IPR-WRW27	White	350mA	2700K	95	65	Yes*	MOD1WIP-2700	III
IPR-WRW27-AC	White	220 - 240V**	2700K	95	65	No	MOD1WIP230V-2700	I


*Dimmable when used with a dimmable driver ** Integrated Driver

pyrenees IP65

1W CREE XPE Power LED
95 lumens / 30° beam angle



CUT OUT
60mm

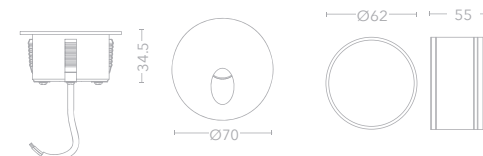

IP65

Key Features

- Sand white / Sand black
- Aluminium
- Mounting sleeve included for solid wall applications
- These items are assembled to order, and do not show as in stock on the website or stock feed



RW-STP-W

RW-STP-B

RW-STP-GO




RW-STP-GO



Use with standard UK single wiring
accessory backbox, min depth 35mm

steplight

- RW-STP-B ■
- RW-STP-W □
- RW-STP-GO ■




Key Features

Matt black / White / Gold
Plastic
3000K 80 lumens
1.5W SMD LED
⚠ Only suitable for UK and
Ireland customers. Not for sale in
mainland Europe.



RW-RUN-GO

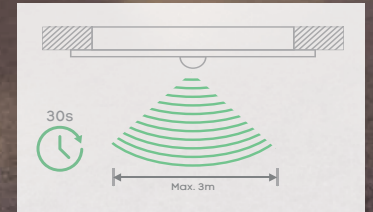


RW-RUN-B

RW-RUN-GO

RW-RUN-W

runway steplight

- RW-RUN-B ■
- RW-RUN-W □
- RW-RUN-GO ■



Key Features

Matt black / White / Gold
Plastic
3000K
1.5W SMD LED
80 lumens
⚠ Only suitable for UK and
Ireland customers. Not for sale in
mainland Europe.



IPR-HOLSSAG



IPR-HOLSS



IPR-HOXSS



IPR-HOLSS




IPR-HOXCP

holborn IP65

IPR-HOLSS

1W CREE XPE Power LED
90 lumens / 120° beam angle



CUT OUT
38mm


hoxton IP65

IPR-HOXSS


IPR-HOXCP

1W CREE XPE Power LED
90 lumens / 120° beam angle


CUT OUT
38mm


Key Features

Polished chrome / Satin stainless steel 316 / Aluminium body
3000K
Very shallow profile
Driver supplied separately,
see pg. 217
Fittings must be wired in series

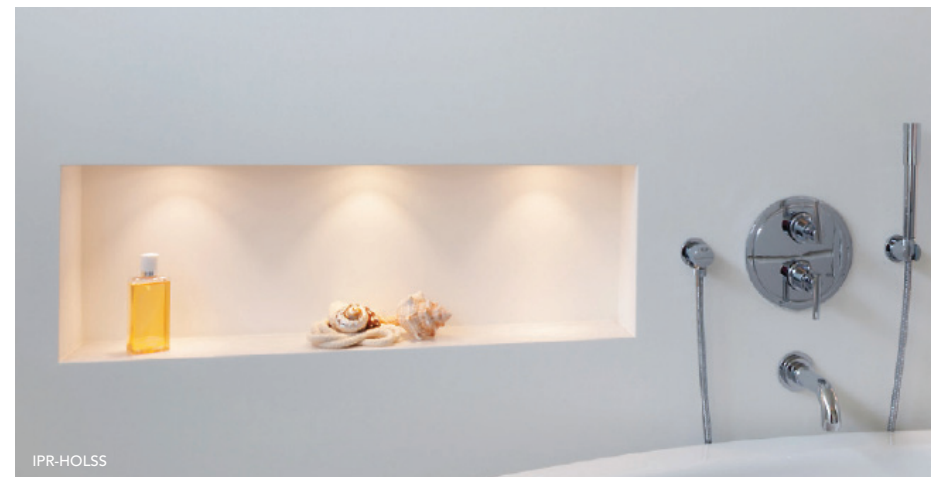


IPR-HOLSS

holborn anti glare IP65

IPR-HOLSSAG


CUT OUT
38mm


IPR-HOLSSAG



diana IP44

DL-DIA-W



DL-DIA-W


CUT OUT
38mm


Key Features

Satin stainless steel 316
1W CREE XPE / 3000K
25 lumens / Beam angle: 120°
Very shallow profile
Driver supplied separately,
see pg. 217
Fittings must be wired in series



Key Features

Sand white finish / Die cast body
1W Olsen LED / 3000K
95 lumens / Beam angle: 30°
Driver supplied separately,
see pg. 217
Fittings must be wired in series

spot & track






bronze moon 1

SP-MOO1-BZ ■

1 x GU10

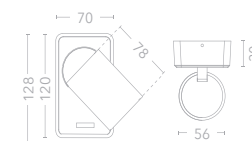


bronze moon 1 switched

SP-MOO1S-BZ ■

1 x GU10

Switched

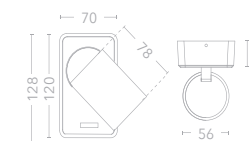


bronze moon 1 switched USB

SP-MOO1SUSB-BZ ■

1 x GU10

Switched


USB A&C






bronze moon 1 round

SP-MOO1R-BZ ■
1 x GU10



bronze moon 3

SP-MOO3-BZ ■
3 x GU10

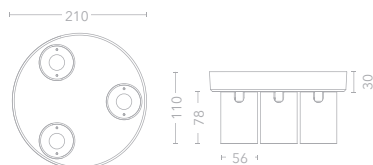

bronze moon 2 bar




SP-MOO2-BZ ■
2 x GU10

bronze moon 3 bar

SP-MOO3L-BZ ■
3 x GU10

bronze moon 4 bar

SP-MOO4-BZ ■
4 x GU10



CLASS 1



DIMMABLE

Key Features


Matt bronze

Aluminium

GU10 Max. 10W each

Ceiling / Wall mounted

350° Rotation, 90° Pivot

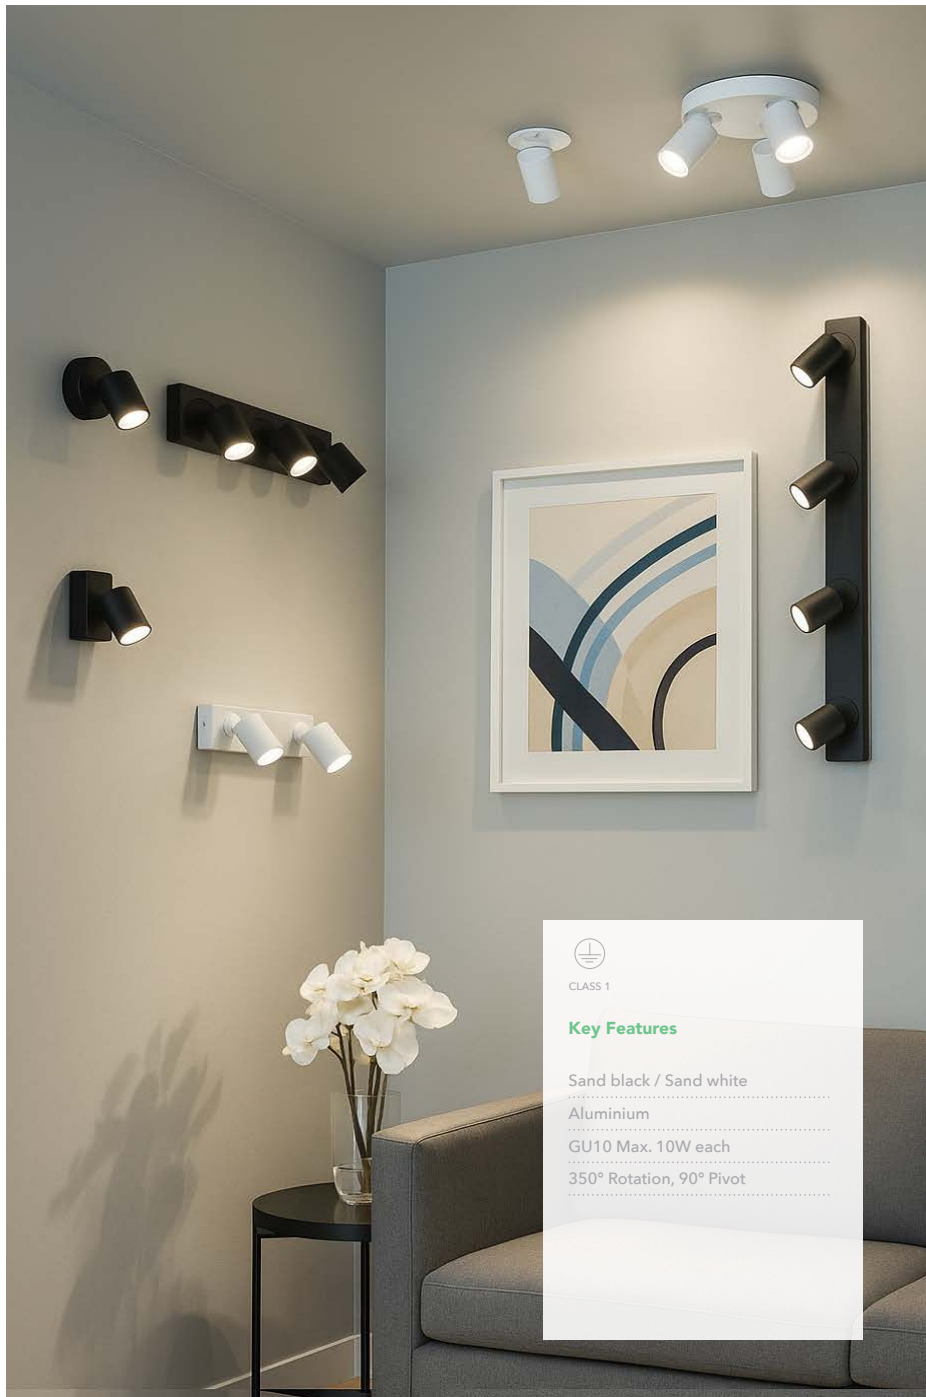

Key Features

Sand black / Sand white

Aluminium

GU10 Max. 10W each

350° Rotation, 90° Pivot



moon 1

SP-MOO1-B



SP-MOO1-W



1 x GU10

moon 1 switched

SP-MOO1S-B



SP-MOO1S-W



1 x GU10

Switched

moon 1 switched USB

SP-MOO1SUSB-B






SP-MOO1SUSB-W



1 x GU10

Switched

USB A&C






SP-MOO1R-B

moon 1 round

SP-MOO1R-B ■
SP-MOO1R-W □
1 x GU10




SP-MOO3-W



SP-MOO3-B

moon 3 round

SP-MOO3-B ■
SP-MOO3-W □
3 x GU10

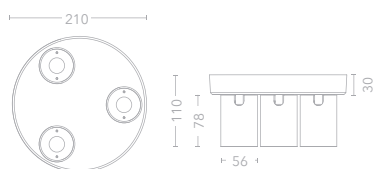

SP-MOO4-B



SP-MOO3L-B



SP-MOO2L-W

moon 2 bar

SP-MOO2-B ■
SP-MOO2-W □
2 x GU10

moon 3 bar

SP-MOO3L-B ■
SP-MOO3L-W □
3 x GU10

moon 4 bar

SP-MOO4-B ■
SP-MOO4-W □
4 x GU10




CLASS 1




DIMMABLE

Key Features

Sand black / Sand white
Aluminium
GU10 Max. 10W each
Ceiling / Wall mounted
350° Rotation, 90° Pivot

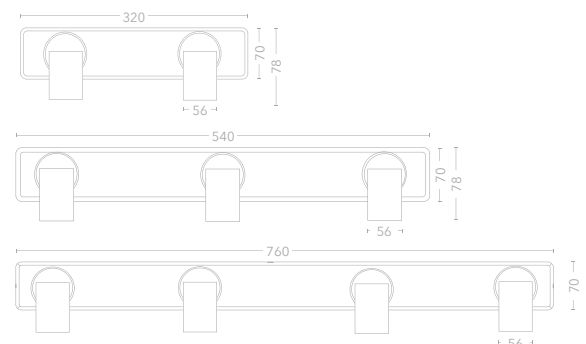

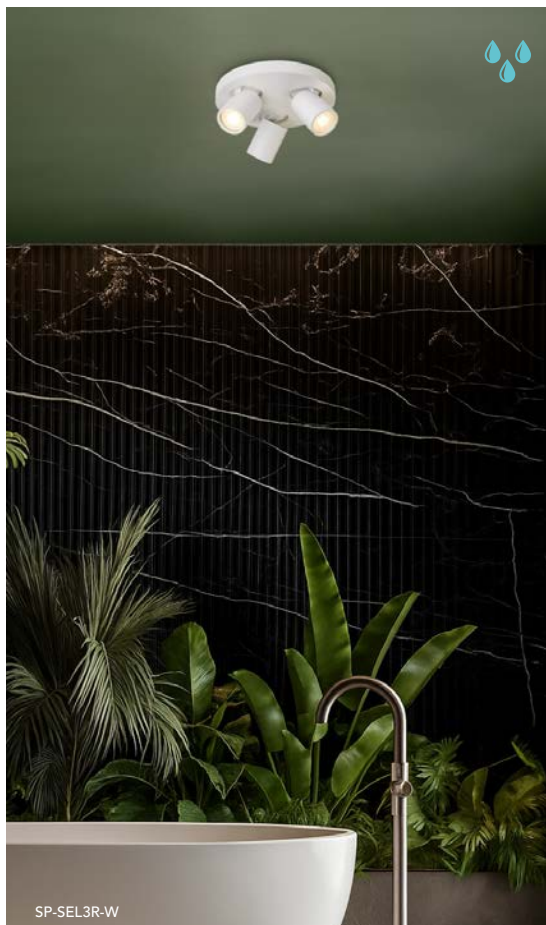

SP-SEL3R-W



SP-SEL3R-BZ




SP-SEL3R-B



SP-SEL3R-W

selene 3 round IP44

SP-SEL3R-BZ
SP-SEL3R-B
SP-SEL3R-W
3 x GU10



Key Features

Matt bronze / Sand white / Sand
black
Aluminium
3 x GU10 Max. 10W
Ceiling / Wall mounted
350° Rotation, 90° Pivot



SP-SEL3L-BZ



SP-SEL3L-W




SP-SEL3L-B



SP-SEL3L-BZ

selene 3 bar IP44

SP-SEL3L-BZ
SP-SEL3L-B
SP-SEL3L-W
3 x GU10

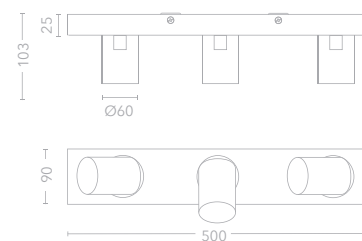

Key Features

Matt bronze / Sand white / Sand
black
Aluminium
3 x GU10 Max. 10W
Ceiling / Wall mounted
350° Rotation, 90° Pivot




Anodised bronze with matt bronze backplate



Anodised gold with sand black backplate

anna 1

SP-ANN1-GO ■
SP-ANN1-BZ ■
1 x GU10



Key Features

Anodised gold & Sand black /
Anodised bronze & Matt bronze
Aluminium
Living finishes
GU10 Max. 10W each
Ceiling / Wall mounted
350° Rotation, 90° Pivot



SP-ANN3-BZ



SP-ANN2-GO



SP-ANN2-GO



SP-ANN3-GO




SP-ANN2-BZ



SP-ANN4-BZ


anna 2

SP-ANN2-GO ■
SP-ANN2-BZ ■
2 x GU10



anna 3

SP-ANN3-GO ■
SP-ANN3-BZ ■
3 x GU10




CLASS 1 DIMMABLE

Key Features

Anodised gold & Sand black /
Anodised bronze & Matt bronze
Aluminium
Living finishes
GU10 Max. 10W each
Ceiling / Wall mounted
350° Rotation, 90° Pivot

anna 4

SP-ANN4-GO ■
SP-ANN4-BZ ■
4 x GU10



CLASS 1 DIMMABLE

Key Features

Anodised gold & Sand black /
Anodised bronze & Matt bronze
Aluminium
Living finishes
GU10 Max. 10W each
Ceiling / Wall mounted
350° Rotation, 90° Pivot



SP-CIA4-BZ



SP-CIA1-GO




SP-CIA1-GO



SP-CIA3-BZ

ciara 1

SP-CIA1-GO ■
 SP-CIA1-BZ ■
 1 x mini GU10



See pg. 217 for dimmable Mini GU10 lamps, available in 2700K, 3000K and 4000K




CLASS 1 DIMMABLE

Key Features

Anodised gold & Sand black /
 Anodised bronze & Matt bronze
 Aluminium
 Living finishes
 Mini GU10 lamp (MR11)
 max. 5W
 350° rotation, 90° pivot
 Ceiling / Wall mounted


ciara 3

SP-CIA3-GO ■
 SP-CIA3-BZ ■
 3 x mini GU10



ciara 4


SP-CIA4-GO ■
 SP-CIA4-BZ ■
 4 x mini GU10

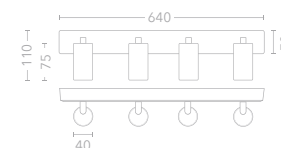

CLASS 1 DIMMABLE

Key Features

Anodised gold & Sand black /
 Anodised bronze & Matt bronze
 Aluminium
 Living finishes
 Mini GU10 lamp (MR11)
 max. 5W
 350° rotation, 90° pivot
 Ceiling / Wall mounted

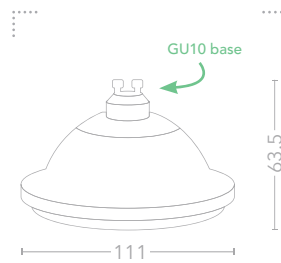


ES111 lamp (not included.)




jupiter 1

SP-JUP1-B ■▲
 SP-JUP1-W □▲
 1 x ES111



jupiter 2

SP-JUP2-B ■▲
 SP-JUP2-W □▲
 2 x ES111

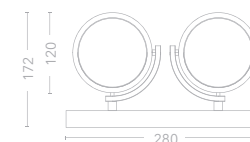

CLASS 1 DIMMABLE

Key Features


Sand black / Sand white

Steel / Aluminium

Ceiling / Wall mounted

350° Rotation, 120° Pivot

black and white track lengths

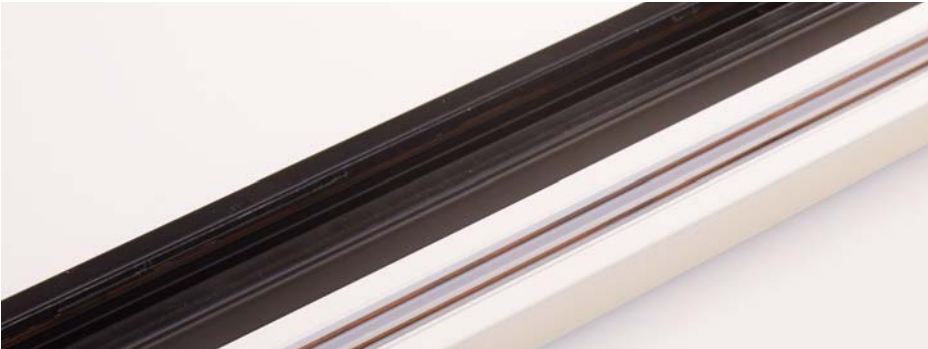

1m track only

- TR-T1-B ■
- TR-T1-W □

2m track only

- TR-T2-B ■
- TR-T2-W □

track kits including live end & end cap



TR-1B / TR-1W

1m track kit

- TR-1B ■
- TR-1W □

Includes live end & end cap
L1000 x W35 x H18mm

2m track kit


- TR-2B ■
- TR-2W □

Includes live end & end cap
L2000 x W35 x H18mm



Key Features

- Extensive range of track & connectors
- Ideal for applications where fittings need to be moved or added
- Earth on the neutral side
- Track can be cut to any length

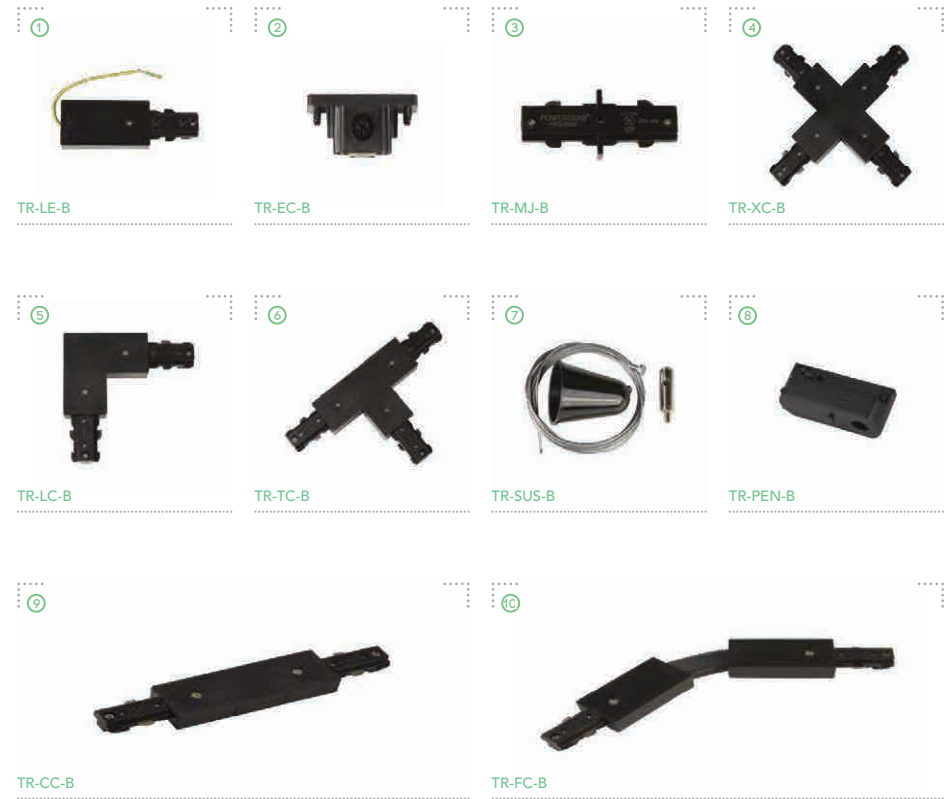


black and white track accessories

Item	Finishes
① Live end	■ TR-LE-B / □ TR-LE-W
② End cap	■ TR-EC-B / □ TR-EC-W
③ Mini-joiner	■ TR-MJ-B / □ TR-MJ-W
④ X-Connector	■ TR-XC-B / □ TR-XC-W
⑤ L-Connector	■ TR-LC-B / □ TR-LC-W
⑥ T-Connector	■ TR-TC-B / □ TR-TC-W
⑦ 3m suspension	■ TR-SUS-B / □ TR-SUS-W (longer suspensions available on request)
⑧ Pendant Adapter	■ TR-PEN-B / □ TR-PEN-W
⑨ Centre Connector	■ TR-CC-B / □ TR-CC-W
⑩ Flexible Connector	■ TR-FC-B / □ TR-FC-W

⚡ Accessories with this symbol can be used as a power feed in.

bronze and gold track lengths

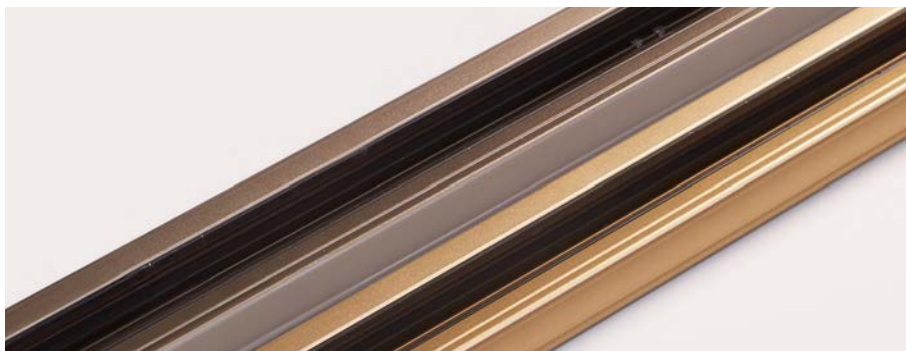

1m track only

TR-T1-BZ ■
TR-T1-GO ■

2m track only

TR-T2-BZ ■
TR-T2-GO ■

track kits including live end & end cap



TR-1GO / TR-1BZ

1m track kit

TR-1BZ ■
TR-1GO ■

Includes live end & end cap
L1000 x W35 x H18mm

2m track kit


TR-2BZ ■
TR-2GO ■

Includes live end & end cap
L2000 x W35 x H18mm




Key Features

Extensive range of track
& connectors
Ideal for applications where
fittings need to be moved or
added
Earth on the neutral side
Track can be cut to any length

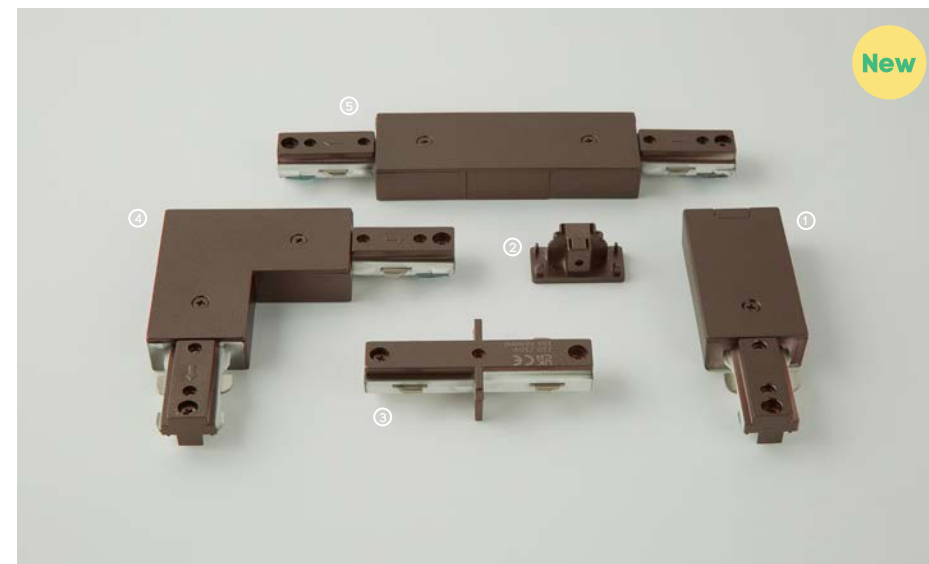

New

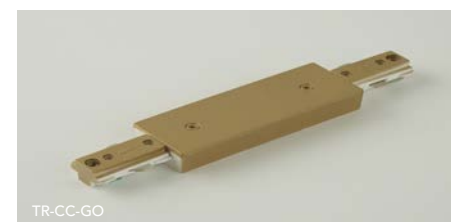

TR-CC-GO



TR-MJ-GO


bronze and gold track accessories

Item		Finishes
① Live end	⚡	■ TR-LE-BZ / ■ TR-LE-GO
② End cap		■ TR-EC-BZ / ■ TR-EC-GO
③ Mini-joiner		■ TR-MJ-BZ / ■ TR-MJ-GO
④ L-Connector	⚡	■ TR-LC-BZ / ■ TR-LC-GO
⑤ Centre Connector	⚡	■ TR-CC-BZ / ■ TR-CC-GO

⚡ Accessories with this symbol can be used as a power feed in.



Add your
chosen
pendant
to track...

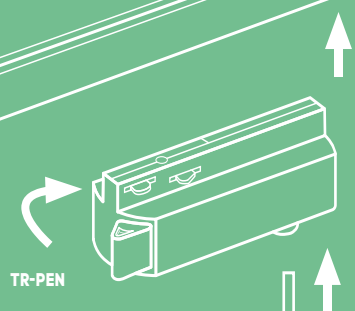

TR-PEN

Pick your pendant
here



PE-APO-B




PE-ART-W



PE-ANN-B

project
collection
searchlight

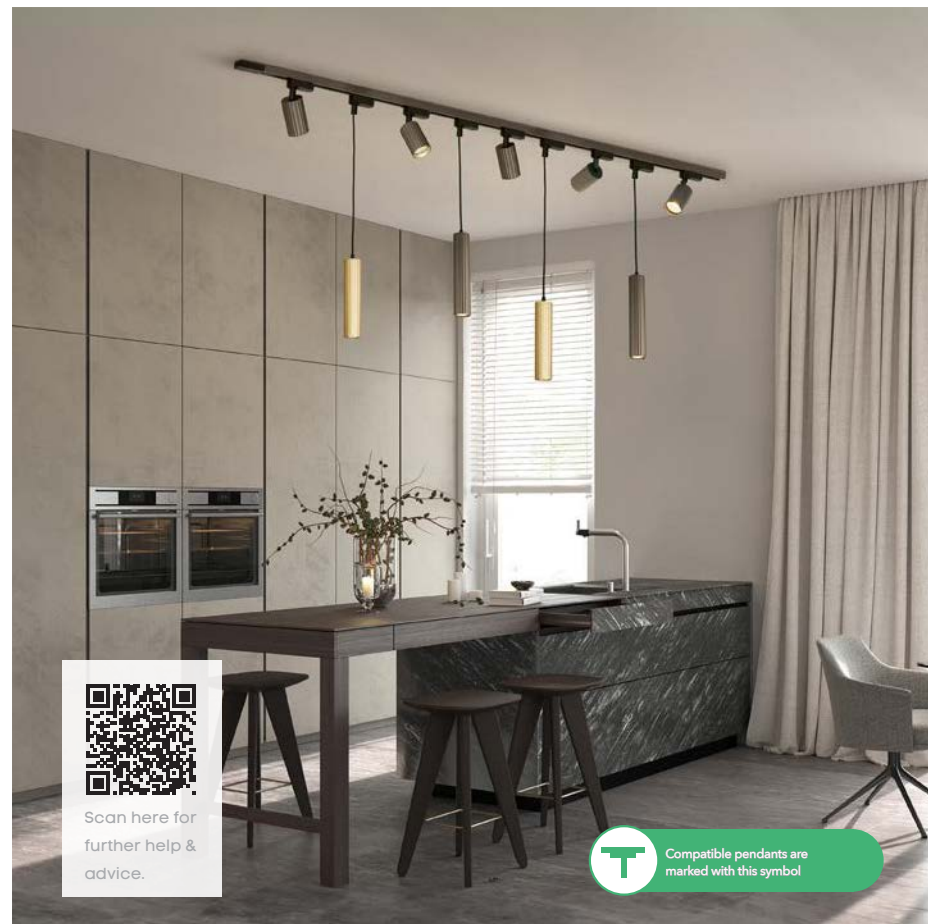

Scan here for
further help &
advice.




Compatible pendants are
marked with this symbol

pendant track adapter

TR-PEN-B ■

TR-PEN-W □

Use with any mains voltage pendant
that takes a replaceable lamp. Must
be under 2kg and suspended by a
single power cable.



TR-PEN-B



CLASS 1



DIMMABLE



230 VOLTS

Key Features

Pendant requirements:

1. Suspended by a single power cable
2. Maximum 2kg weight
3. Takes a replaceable 230V lamp (bulb)



Compatible
pendants are marked
with this symbol



TR-ANN-BZ

TR-ANN-GO



For detailed drawings and specifications along with help & advice, visit www.projectcollection.co.uk




TR-ANN-B

TR-ANN-W

anna GU10 track spot

- TR-ANN-BZ ■
- TR-ANN-GO ■
- TR-ANN-B ■
- TR-ANN-W □

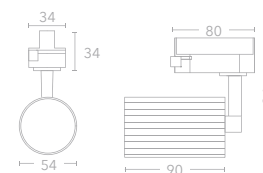

Key Features

- Anodised gold / Anodised bronze
- (Living finishes)
- Sand Black / Sand White
- Aluminium
- GU10 LED Max. 10W
- 350° Rotation / 90° Pivot



TR-ORI2-BZ

TR-ORI2-GO




TR-ORI2-B

TR-ORI2-W



orion 2 GU10 track spot

- TR-ORI2-BZ ■
 TR-ORI2-GO ■
 TR-ORI2-B ■
 TR-ORI2-W □

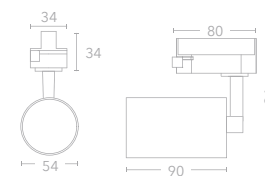

Key Features

- Anodised gold / Anodised bronze
(Living finishes)
- / Sand Black / Sand White
- Aluminium
- GU10 Max. 10W
- 350° Rotation / 90° Pivot

New



New



TR-LIB-BZ




TR-LIB-WW



TR-LIB-B

libra GU10 track spot

- TR-LIB-BZ ■
- TR-LIB-B ■
- TR-LIB-WW □




Key Features

- Matt bronze / Sand black / Sand white
- Aluminium
- GU10 Max. 10W
- 350° Rotation / 90° Pivot

laser GU10 track spot

- TR-LAS-B ■
- TR-LAS-W □

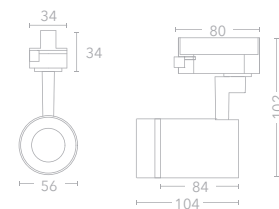

Key Features

- Sand black / Sand white
- Aluminium
- GU10 Max. 10W
- 350° Rotation / 90° Pivot
- On/Off switch on track connector

See pages below for the rest of the laser family:

- laser pendant 52
- laser reader 146
- laser spot 147



CCT and power switches within body



2 CCT



10W / 12W / 15W




TR-AND-W

TR-AND-B

andromeda GU10 track spot

TR-AND-B ■
TR-AND-W □

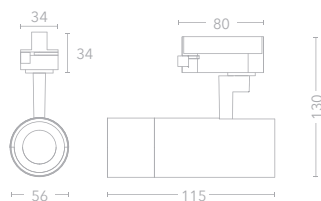

CLASS 2 DIMMABLE

Key Features

Sand white / Sand black

Aluminium

GU10 LED Max. 10W

350° Rotation / 90° Pivot

Suitable for use with longer lamp lengths



TR-TAU-W


TR-TAU-B

taurus LED track spot

TR-TAU-B ▲■
TR-TAU-W ▲□

1350 lumens at 4000K, 15W
1150 lumens at 3000K, 15W

Taurus is supplied with a
default setting of 3000K, 15W

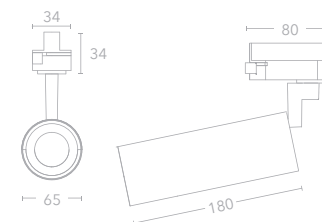

CLASS 2 2CCT

Key Features

Sand white / Sand black

Power selectable 10W, 12W, 15W

CCT selectable 3000K / 4000K

Switches located in body of fitting, see image above

350° Rotation / 90° Pivot

CRI > 90






wall



sunrise

- WL-SUN-BZ ■ 450 lumens
- WL-SUN-GO ■ 460 lumens
- WL-SUN-B ■ 360 lumens
- WL-SUN-W □ 650 lumens



Key Features

- Matt bronze / Matt gold / Sand black
- / Sand white
- Aluminium
- 6W SMD LED
- 3000K



Anodised Bronze



Anodised Gold



Sand Black




Sand White




anna single

WL-ANN1-BZ
WL-ANN1-GO
WL-ANN1-B
WL-ANN1-W
1 x GU10



anna double

WL-ANN2-BZ
WL-ANN2-GO
WL-ANN2-B
WL-ANN2-W
2 x GU10




Key Features

Anodised bronze* / Anodised gold*
/ Sand black / Sand white /
Aluminium
*Living finishes
GU10 Max. 10W each




anna reader

- WL-ANNR-BZ ■
- WL-ANNR-GO ■
- WL-ANNR-B ■

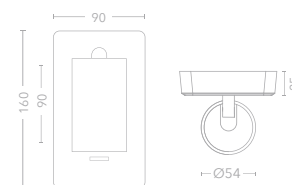

Key Features

- Anodised bronze* / Anodised gold* /
- Sand black
- Aluminium
- *Living finishes
- GU10 Max. 10W each
- 350° Rotation, 90° Pivot

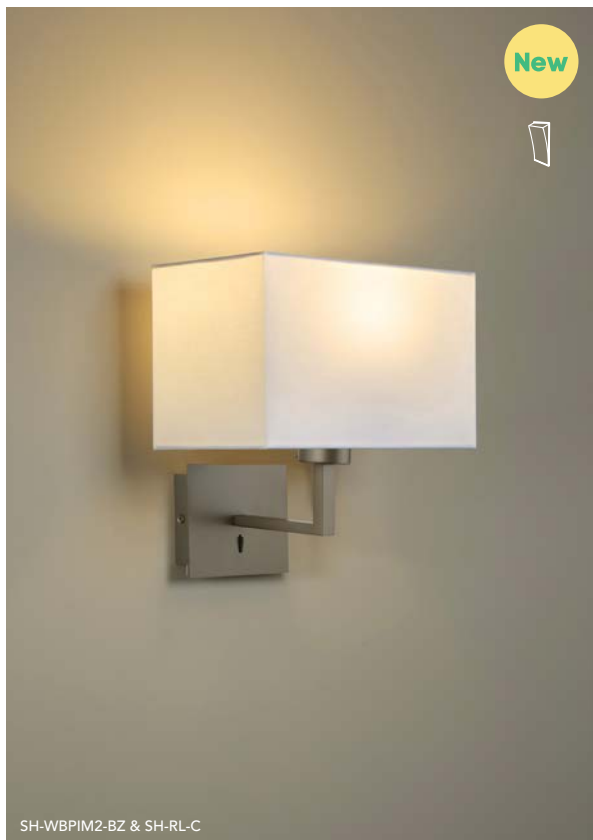

SH-WBPIM2-BZ & SH-RL-C



SH-WBPIM2-BZ



SH-WBPIM2-SN



SH-WBPIM2-MB



SH-WBPIM2R-BZ



SH-WBPIM2R-SN



SH-WBPIM2R-MB




SH-WBPIM2R-BZ & SH-CO-M

pimlico 2

- SH-WBPIM2-BZ ■
- SH-WBPIM2-MB ■
- SH-WBPIM2-SN ■

Shades supplied separately,
see pg.176-181

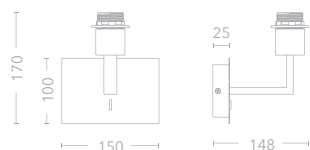

Key Features


Matt bronze / Matt black / Satin
nickel

E27 Max. 20W

pimlico 2 reader

- SH-WBPIM2R-BZ ■
- SH-WBPIM2R-MB ■
- SH-WBPIM2R-SN ■

Shades supplied separately,
see pg.176-181

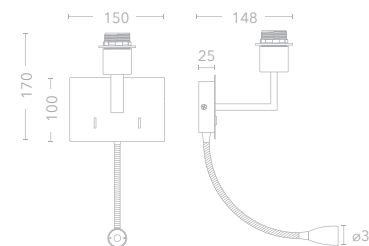


Key Features

Matt bronze / Matt black / Satin
nickel

E27 Max. 20W

Reading Arm

3000K
1W CREE XPE Power LED
90 lumens
Replaceable LED 'MOD1W'

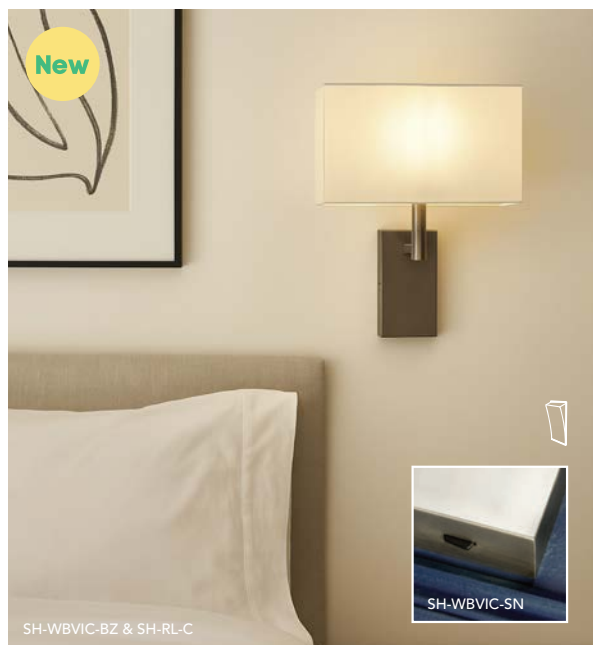

Shades supplied separately, see pg. 176-181





victoria

SH-WBVIC-BZ
SH-WBVIC-MB
SH-WBVIC-SN



Key Features

Matt bronze / Matt black /
Satin nickel
Steel
E27 Max. 20W

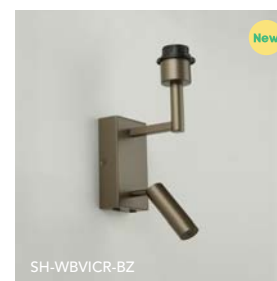

victoria reader

SH-WBVICR-BZ
SH-WBVICR-MB
SH-WBVICR-SN




Key Features

Matt bronze / Matt black /
Satin nickel
E27 Max. 20W

Reading Arm

3000K
1W CREE Power LED / 90 lumens
E27 LED Max. 20W
90° pivot, 350° rotation
Replaceable LED 'MOD1W'




Shades supplied separately, see pg. 176-181





laser spot

SP-LAS1S-B ■
SP-LAS1S-W □

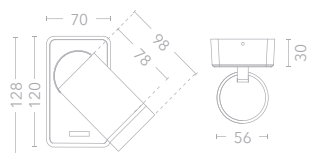

See pages below for the rest of the laser family:

laser pendant	52
laser GU10 track	131
laser reader	147




Key Features

Sand black / Sand white
Aluminium
GU10 Max. 10W
Switch on front face
350° rotation, 90° pivot

laser reader

WL-LASR-B ■
Backlight: 390 lumens
WL-LASR-W □
Backlight: 660 lumens

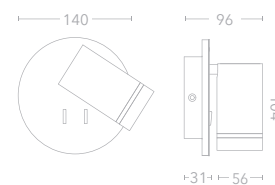

See pages below for the laser range:

laser pendant	52
laser GU10 track	131
laser spot	146



Key Features

Sand black / Sand white
Aluminium / Steel
3000K
Backlight: 7W SMD LED
GU10 Max. 10W
90° pivot, 350° rotation




WL-BLF-W



WL-BLF-B

blackfriars

WL-BLF-B ■
WL-BLF-W □
350 lumens



Key Features

Matt black / Sand white
Aluminium / Steel
3000K
3W Bridgelux COB LED
Arm pivots 180°
Head rotates 350° and pivots 90°



WL-CIAR-GO




WL-CIAR-GO



WL-CIAR-BZ

ciara wall

WL-CIAR-GO ■
WL-CIAR-BZ ■




Key Features

Anodised gold & Sand black /
Anodised bronze & matt bronze
Aluminium
Living finishes
Mini GU10 lamp (MR11)
Max. 5W
Soft touch flexi-arm



See pg. 217 for dimmable Mini GU10 lamp, available in 2700K, 3000K and 4000K



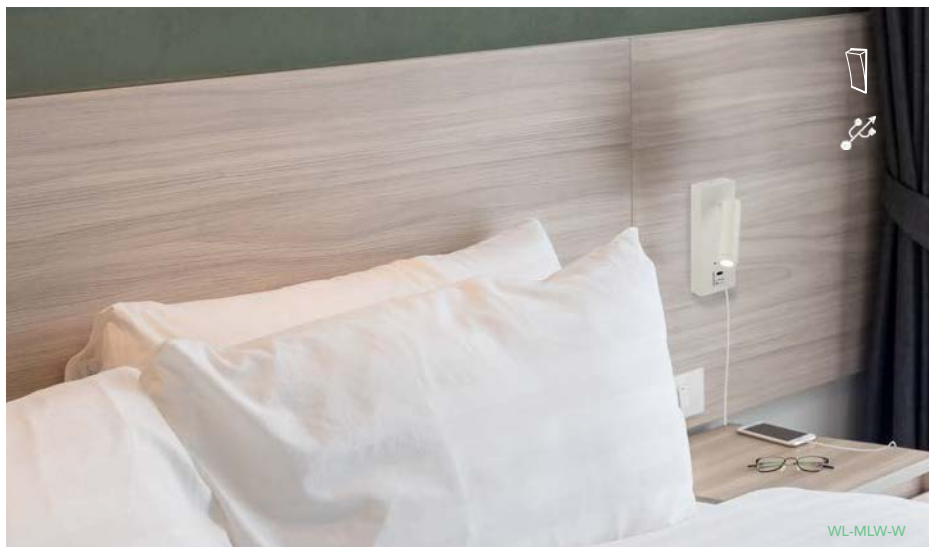

WL-MLW-W



WL-MLW-B



WL-MLW-B



WL-MLW-B


marlow usb

WL-MLW-B ■

300 lumens

WL-MLW-W □

330 lumens

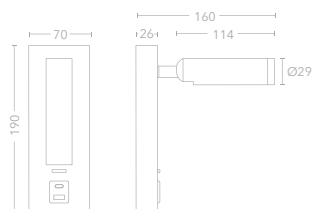

Key Features

Matt black / Sand white

Aluminium / Steel

3000K

4W Bridgelux COB LED

90° pivot, 350° rotation

2.1 amp USB A and USB C



SH-VICLED-BZ



SH-VICLED-MB

FINGERPRINT
RESISTANT
MATT BLACK




SH-VICLED-SN

victoria LED

SH-VICLED-BZ ■

SH-VICLED-MB ■

SH-VICLED-SN ■




victoria LED USB recessed

SH-VICLEDR-MB ■ ▲



SH-VICLEDR-MB

FINGERPRINT
RESISTANT
MATT BLACK

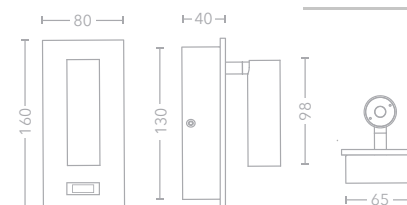

Key Features

Matt bronze / Matt black / Satin

nickel

Steel / Aluminium

3000K

1W CREE XPE Power LED

90 lumens

90° pivot, 350° rotation

Replaceable LED module MOD1W



Key Features

Matt black

Steel / Aluminium

3000K

1W CREE Power LED

90 lumens

90° pivot, 350° rotation

Replaceable LED module MOD1W



WL-MAR-SN



Light off in closed position



WL-MAR-B



Light off in closed position



WL-MAR-BZ




WL-MAR-GO

marylebone recessed

WL-MAR-B

WL-MAR-SN

320 lumens

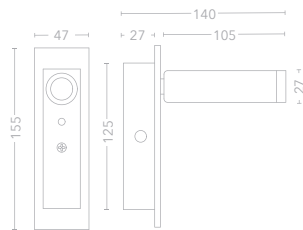

Key Features

Matt black / Satin nickel

Steel / Aluminium

3200K

5W Bridgelux COB LED

90° pivot, 350° rotation


Contact switch - off in the closed position

marylebone recessed

WL-MAR-BZ

WL-MAR-GO

320 lumens

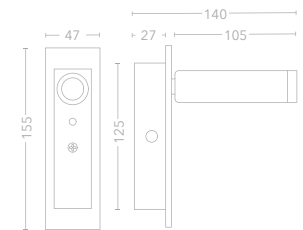

Key Features

Matt bronze / Matt gold

Steel / Aluminium

3200K

5W Bridgelux COB LED

90° pivot, 350° rotation

Contact switch - off in the closed position



New

WL-KIN-GO



WL-KIN-B



WL-KIN-GO



WL-KIN-BZ




Light off in closed position



WL-KIN-BZ

kings cross New

WL-KIN-BZ
WL-KIN-GO
WL-KIN-B
320 lumens

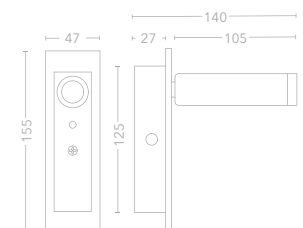

CLASS 1 SWITCH 3200K

Key Features

Matt bronze / Matt gold / Matt black
Steel / Aluminium
3200K
5W Bridgelux COB LED
90° pivot, 350° rotation
Contact switch - off in the closed
position



WL-SOU24-W



WL-SOU24-B

WL-SOU24-W



Interior view



WL-SOU24-B


southwark

WL-SOU24-B ■

350 lumens

WL-SOU24-W □

720 lumens

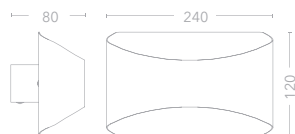

CLASS 1 DIMMABLE 3000K

Key Features

Sand black / Sand white


Aluminium

3000K

12W SMD LED



WL-SLO1-B



WL-SLO1-W



WL-SLO2-B



Interior view


sloane 1

WL-SLO1N-B ■

260 lumens

WL-SLO1N-W □

270 lumens




sloane 2

WL-SLO2-B ■

500 lumens

WL-SLO2-W □

525 lumens



CLASS 1 3000K

Key Features

Sand black / Sand white

Aluminium

3000K

Dimmable (Sloane 2 only)


4W / 6W Power LED



WL-LB10



WL-LB20

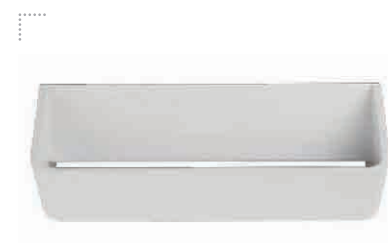

WL-LB38



WL-LB38



WL-LB20

london bridge

WL-LB10  
7W POWER LED
450 lumens


WL-LB20  
7W SMD LED
600 lumens

WL-LB38  
13W SMD LED
1050 lumens

 
CLASS 1 3000K

Key Features

Sand white
3000K
Can be fitted vertically or horizontally

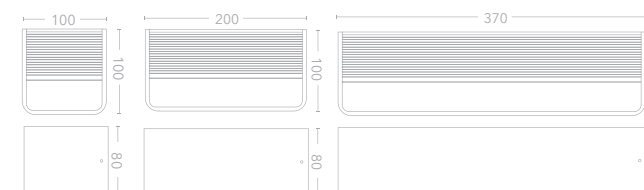



2 CCT



vavin 60cm

WL-VAVS60



16W LED
620 lumens at 3000K
650 lumens at 4000K

vavin 90cm

WL-VAVS90



25W LED
870 lumens at 3000K
940 lumens at 4000K

vavin 120cm

WL-VAVS120



36W LED
1250 lumens at 3000K
1390 lumens at 4000K



CLASS 2



DIMMABLE



2 CCT

Key Features

Sand white
Metal / Acrylic
3000K / 4000K selectable
switch on back of fitting



BA-VER90



BA-VER90



BA-VEN90

veritas 90cm

BA-VER90



18W SMD LED
1570 lumens

venti 90cm

BA-VEN90



24W SMD LED
1080 lumens

Removable pull cord



CLASS 1



3000K



IP44

Key Features

Polished chrome /
Opal Polycarbonate / Frosted
3000K
Can be fitted vertically
or horizontally
Bathroom zone 2






2 CCT




Item Code	Power (W)	Luminaire lumens at 3000K .	Luminaire lumens at 4000K .
WL-ODO20-W	7	585	620
WL-ODO30-W	12	870	940

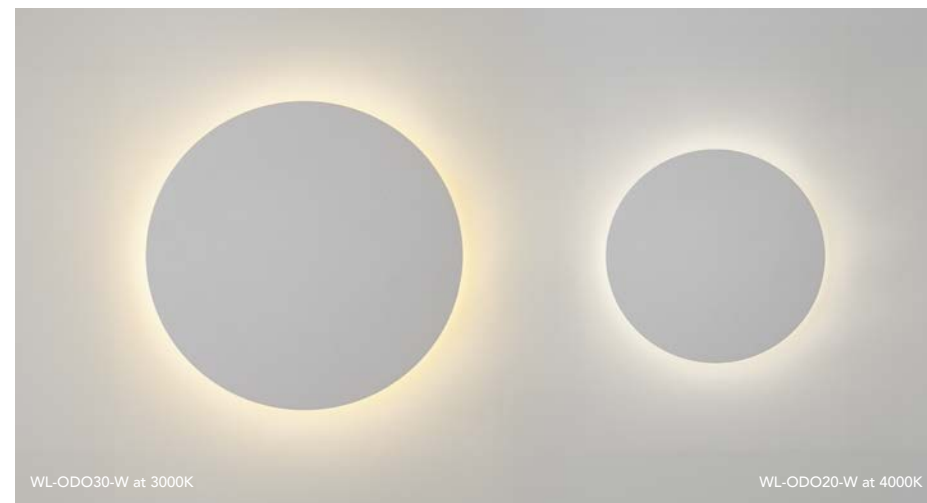

WL-ODO30-W


odeon 20cm

WL-ODO20-W ☐



odeon 30cm

WL-ODO30-W ☐



CLASS 1



DIMMABLE



2CCT

Key Features

Sand white

Steel

CCT Selectable 3000K / 4000K

CCT Switch in backplate



PL-AVRON



PL-AVRON



PL-AVRON


avron

PL-AVRON 
600 lumens



Key Features

White plaster
3000K
10W SMD LED
Paintable with a good quality
emulsion paint

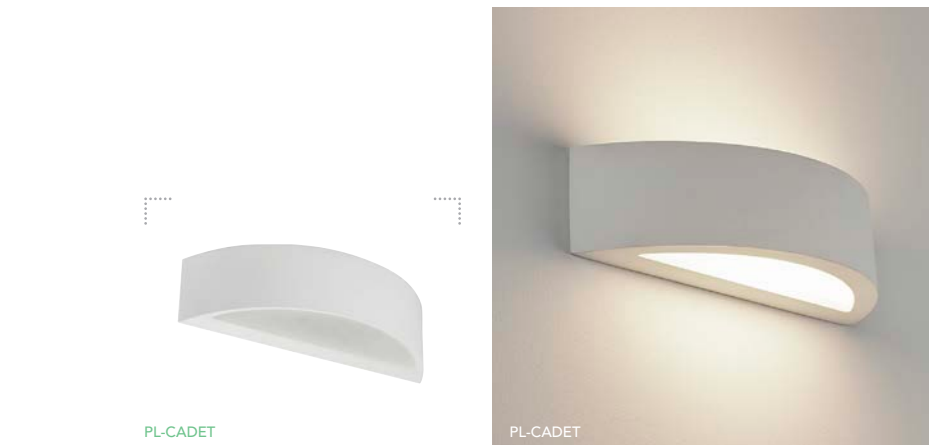

PL-CADET


PL-CADET



PL-CADET

cadet

PL-CADET 
700 lumens



Key Features


White plaster
3000K
9W SMD LED
Paintable with a good quality
emulsion paint



PL-CONCO

concorde round

PL-CONCO 



Key Features


White plaster
2 x GU10 Max. 10W each
Paintable with a good quality
emulsion paint



PL-CONCS

concorde square

PL-CONCS 



Key Features

White plaster
2 x GU10 Max. 10W each
Paintable with a good quality
emulsion paint

table & floor






olympia USB table lamp base

- TA-OLY-BZ-USB ■
- TA-OLY-SN-USB ■
- EUTA-OLY-BZ-USB ■
- EUTA-OLY-SN-USB ■

olympia table lamp base

- TA-OLY-BZ ■
- TA-OLY-SN ■
- EUTA-OLY-BZ ■
- EUTA-OLY-SN ■

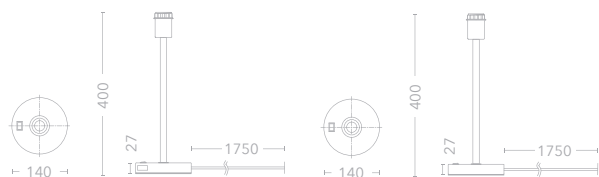

Key Features

- Matt bronze / Satin nickel
- E27 max. 20W
- Switch on base



Shades supplied separately, see pg. 176-181



Shades supplied separately, see pg. 176-181




olympia floor lamp base


- FS-OLY-BZ ■
- FS-OLY-SN ■
- EUFS-OLY-BZ ■
- EUFS-OLY-SN ■



Key Features

- Matt bronze / Satin nickel
- E27 max. 20W
- Inline switch on cable





ciara flexi floor lamp

UK


FS-CIA-BZ ■
FS-CIA-GO ■

EU

EUFS-CIA-BZ ■
EUFS-CIA-GO ■



See pg. 217 for dimmable Mini GU10 lamp, available in 2700K, 3000K and 4000K



Key Features

Anodised bronze/ Anodised gold
Aluminium
Living finishes
Mini GU10 (MR11)
Max. 5 W
Dimmable by rotary switch
Soft touch flexi-arm


ciara flexi table lamp

UK

TA-CIA-BZ ■
TA-CIA-GO ■

EU

EUTA-CIA-BZ ■
EUTA-CIA-GO ■



Key Features

Anodised bronze/ Anodised gold
Aluminium
Living finishes
Mini GU10 (MR11) Max. 5 W
Soft touch flexi-arm
Switch on base

shades



shades



Colour		Cone	Small Rectangle	Large Rectangle	Drum 15	Drum 30	Drum 40
	Coconut	SH-CO-C	SH-RS-C	SH-RL-C	SH-DR15-C ▲	SH-DR30-C	SH-DR40-C
	Mushroom	SH-CO-M	SH-RS-M	SH-RL-M	SH-DR15-M ▲	SH-DR30-M	SH-DR40-M
	Grey Seal					SH-DR30-G ▲	SH-DR40-G


Range	Page no.						
3lt Suspension	179						●
3lt Semi-flush	179						●
Pimlico 2	142-143	●	●	●	●		
Victoria	144-145	●	●	●	●		
Olympia Table	170	●		●		●	
Olympia Floor	171						●

Key


C - Coconut	
M - Mushroom	
G - Grey seal	

All the shades in this collection are:
White PVC lining
To suit E27/E14/B22 shade ring
For use with LED lamps only
Available from stock in the UK
Flame retardant

Shade material without light source



Shade material with 3000K light source




15cm drum



SH-DR15-M

SH-DR15-C ▲
SH-DR15-M ▲



30cm drum



SH-DR30-G

SH-DR30-C SH-DR30-M
SH-DR30-G ▲




40cm drum



SH-DR40-G

SH-DR40-C SH-DR40-M
SH-DR40-G ▲




40cm drum diffuser



SH-DIF40

SH-DIF40 ▲




small rectangle



SH-RS-M

SH-RS-C  SH-RS-M 




large rectangle



SH-RL-G

SH-RL-C  SH-RL-M 




cone



SH-CO-M

SH-CO-C  SH-CO-M 



SH-SF3-SN




SH-P3-SN

E27 3 light semi flush

SH-SF3-SN  

E27 3 light suspension

SH-P3-SN  
1.8m adjustable clear cable

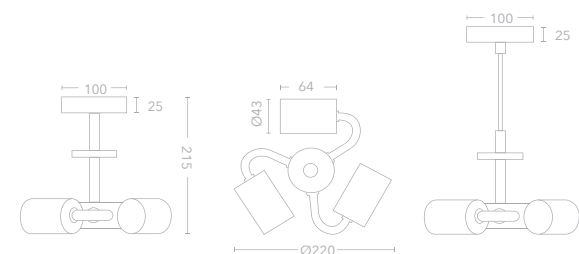

Key Features

E27 20W Max

LED only / 220-240V

IP20

Height adjustable

Suitable for:
40cm Drum shade.
Shades available in colours:
Grey seal / Coconut / Mushroom

bespoke shades




Designed by you and created by us, lampshades can be made in a wide range of styles, fabrics and trimmings to add character to your project. Made to the highest quality by our expert team, we will work with you to create a shade to your exact requirements. Minimum order 50 pieces. Lead time 8 weeks from confirmation. Price on application.



Products with this symbol can be used in coastal locations*

* see pg. 3 for details

outdoor

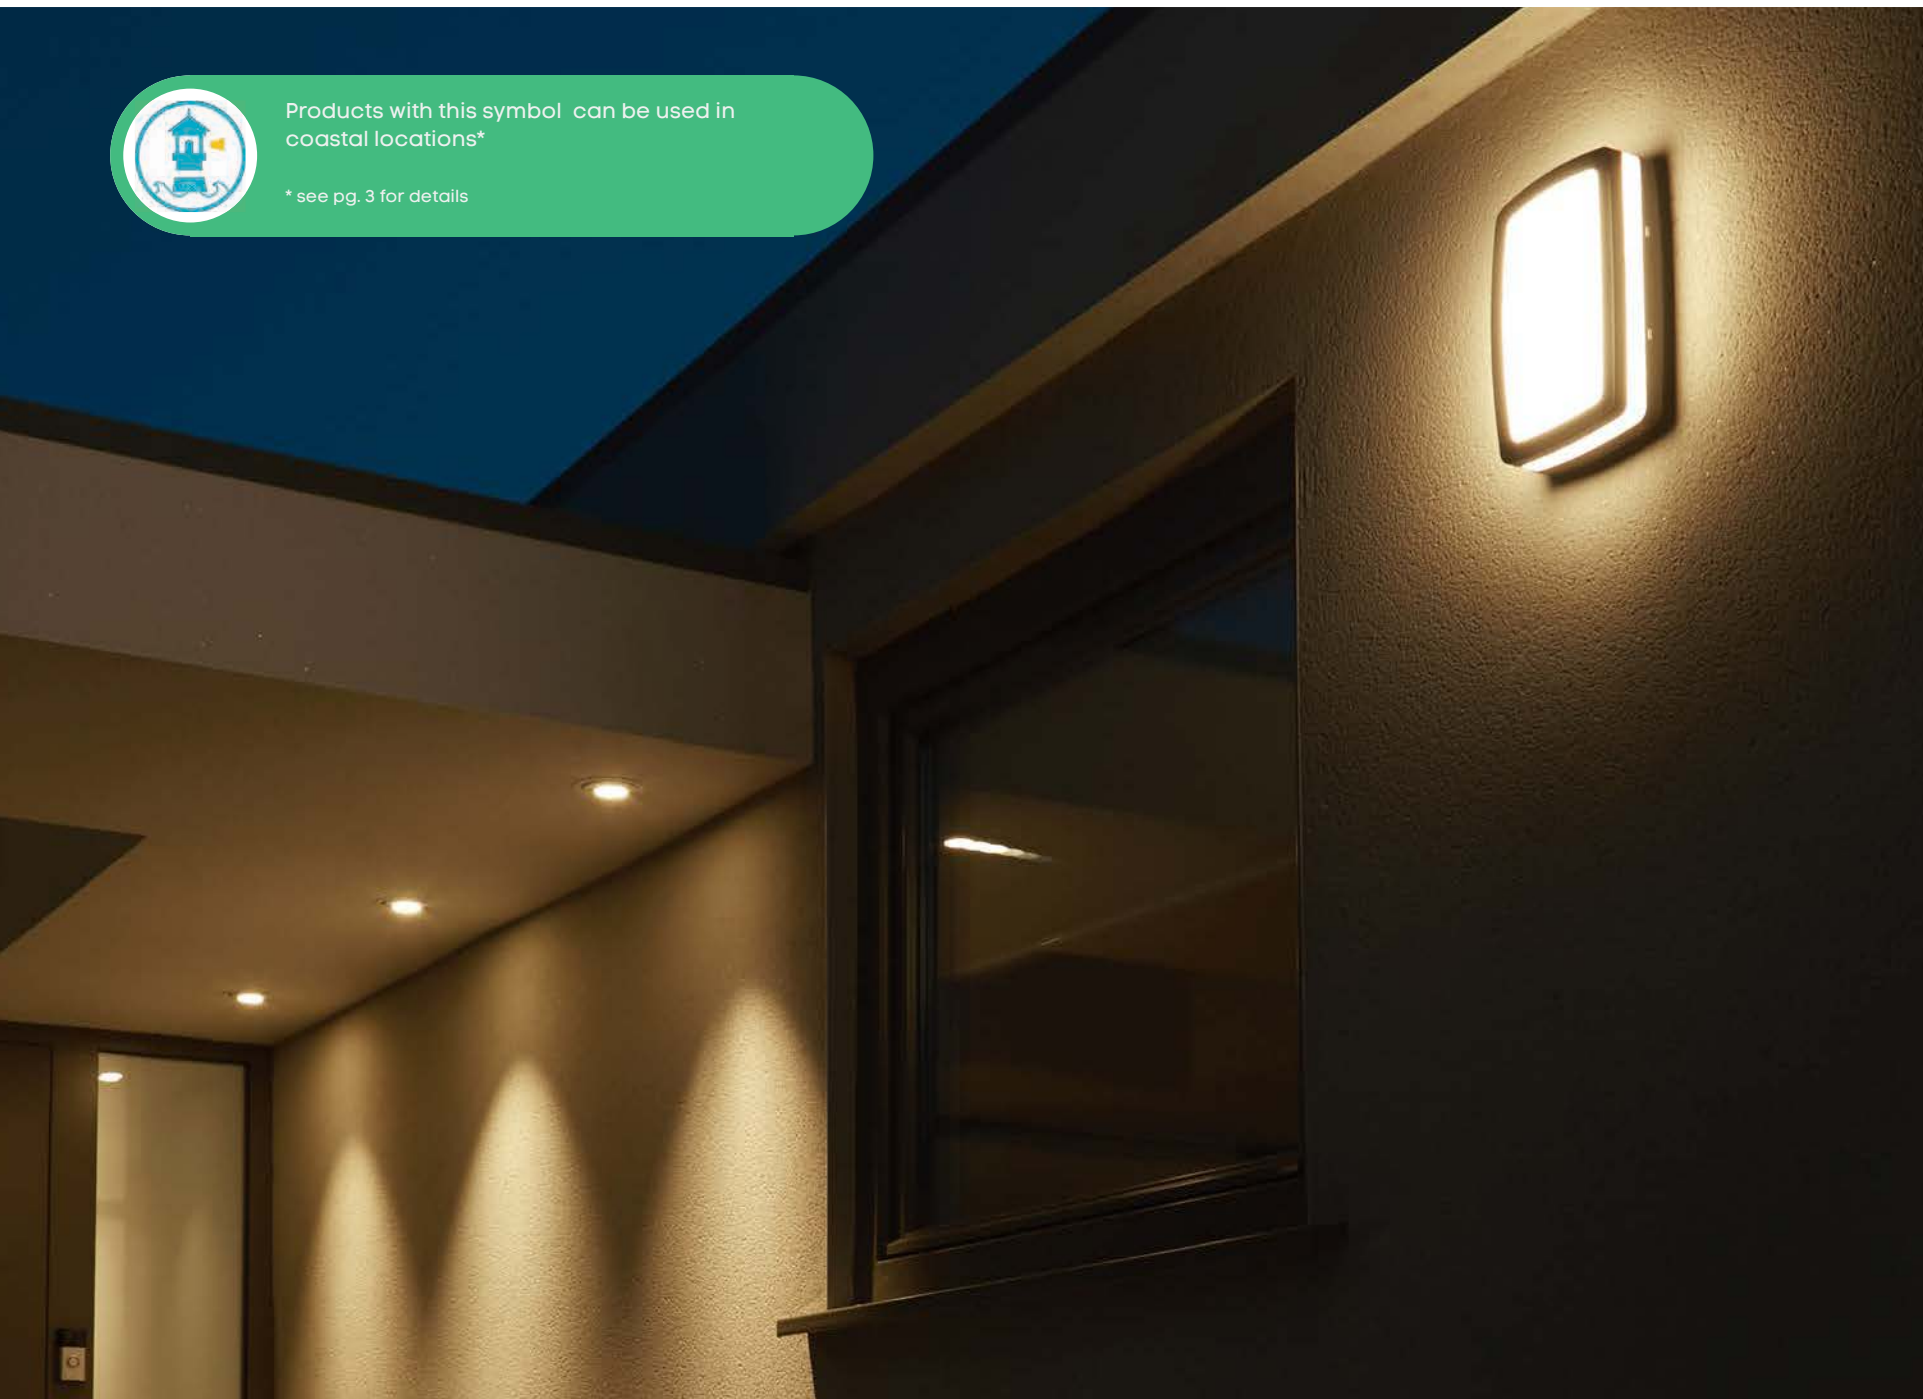



COASTAL
>1KM



OD-FARR & OD-FPOLE



OD-FARR



OD-FARP & 2 x OD-FPOLE




OD-FARP

farrington 8W 230V

OD-FARR ■

8w CREE COB LED
550 Lumens
Pre fitted with 24° reflector,
10° reflector supplied



farrington extension pole

OD-FPOLE ■

300mm extension pole,
use 2 for a 600mm extension




OD-FARR

farrington plus 14W 230V

OD-FARP ■

14W CREE COB LED
1400 lumens
25° beam angle

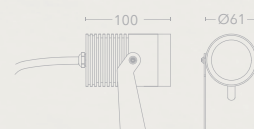

OD-FARP



CLASS 1



IP67



3000K



230 VOLTS

Key Features

Passivated black

Aluminium

3000K

Compatible with OD-FPOLE

Warranted for installations

more than 1000m from the

coast



OD-GRO30-G



OD-GRO80-G



OD-GRO230-G



OD-GRO280-G




grosvenor bollard 30cm

OD-GRO30-G ■
600 lumens



grosvenor bollard 80cm

OD-GRO80-G ■
600 lumens



Key Features

Graphite
Aluminium
3000K
8W CREE COB LED
Warrantied for installations up to
1km from the coast



grosvenor II bollard 30cm

OD-GRO230-G ■
660 lumens



grosvenor II bollard 80cm

OD-GRO280-G ■
660 lumens




Key Features

Graphite
Aluminium
3000K
13W CREE COB LED
Warrantied for installations up to
1km from the coast



OD-CON-G

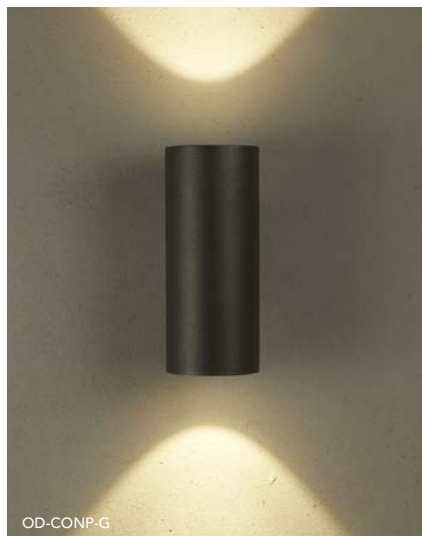

OD-CONP-G



OD-CON-G





OD-CONP-G

connaught

OD-CON-G ■
13W CREE COB LED
1000 Lumens

connaught plus

OD-CONP-G ■
28W CREE COB LED
2150 Lumens



Key Features

Graphite

Aluminium

3000K

Warrantied for installations more
than 1000m from the coast



COASTAL
>1KM



OD-CONP-G

OD-CON-G



OD-SAV-G




OD-SAV-G



OD-SAV-G


savoy

OD-SAV-G ■
700 lumens



Key Features

Graphite
Aluminium
3000K
13W CREE Power LED
Warrantied for installations more
than 1000m from the coast

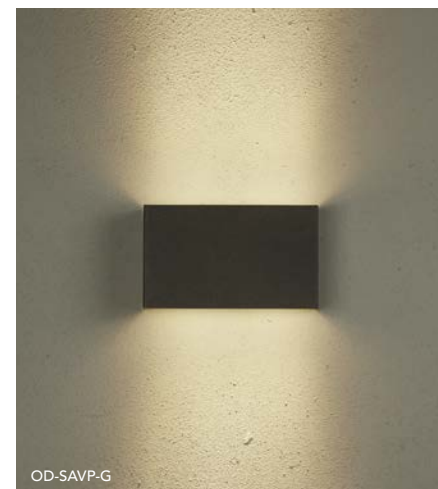

OD-SAVP-G



OD-SAVP-G



OD-SAVP-G

savoy plus

OD-SAVP-G ■
1850 lumens

Narrow beam reaches up to 6m in each
direction



Key Features

Graphite
Aluminium
3000K
18W Osram Power LED
Warrantied for installations more
than 1000m from the coast



COASTAL
>1KM



OD-LAN-G



OD-LAN-G

lanesborough

OD-LAN-G ■
1150 lumens



OD-LAN-G



Key Features

Graphite
Aluminium
3000K
13W CREE COB LED
Warrantied for installations more
than 1000m from the coast




OD-BER2-G



OD-BER2-G

berkeley II

OD-BER2-G ■ ▲
8W Osram LED
825 lumens



COASTAL
>1KM



OD-BER2-G



Key Features

Graphite
Aluminium
3000K
8W Osram LED
Warrantied for installations more
than 1000m from the coast
Only to be fitted in the downward
position, as shown



COASTAL
>1KM

OD-STR-G

OD-MAY-G

Adjustable beam angles



OD-STR-G



OD-MAY-G



OD-STR-G



OD-MAY-G


strand adjustable

OD-STR-G ■
13W CREE LED
500 lumens



mayfair adjustable

OD-MAY-G ■
6W CREE LED
270 lumens



Key Features

Graphite
Aluminium
3000K
Warranted for installations more
than 1000m from the coast
Adjustable shutters top and
bottom to change the beam
angles independently


outdoor



OD-CHIBA

chiba duo

OD-CHIBA ■
1050 lumens

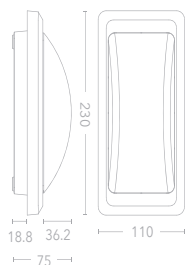

Key Features


Dark grey
PC / ABS Material
3000K
13W SMD LED
Corrosion resistant
Suitable for use in coastal areas
Wall or ceiling mounted



OD-TOKYO

tokyo

OD-TOKYO ■
800 lumens



Key Features

Dark grey
PC / ABS Material
3000K
13W SMD LED
Corrosion resistant
Suitable for use in coastal areas
Wall or ceiling mounted





OD-SAPS-GW


sapporo square

OD-SAPS-GW ■ / □
1.1W SMD LED
45 lumens



Key Features

Dark grey and white covers
supplied in the box
PC / ABS Material
3000K
Corrosion resistant
Suitable for use in coastal areas
Surface mounted



OD-SUZ-GW



OD-SAPL-GW



OD-SUZ-GW

sapporo long

OD-SAPL-GW ■ / □
3.5W SMD LED
265 lumens


suzuka slot

OD-SUZ-GW ■ / □
3W SMD LED
310 lumens



Key Features


Dark grey and white covers
supplied in the box
PC / ABS Material
3000K
Corrosion resistant
Suitable for use in coastal areas
Surface mounted

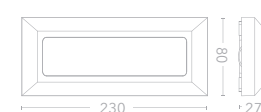



yokohama

OD-YOK ■
320 lumens

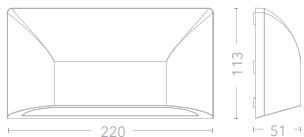

Key Features


- Dark grey
- PC / ABS Material
- 3000K
- 6W SMD LED
- Corrosion resistant
- Suitable for use in coastal areas
- Surface mounted

For detailed drawings and specifications along with help & advice, visit www.projectcollection.co.uk



peri 30cm

CE-PERI30 □ ▲



Rear and side cable entry




Key Features

- White
- Polycarbonate
- 3000K / 4000K / 5000K selectable
- CCT switch in body
- 17W SMD LED
- Ceiling or wall mounted
- Suitable for use in coastal areas




kyoto small

OD-KYOS ■
17W SMD LED
1000 lumens



kobe medium

OD-KOBM ■
16W SMD LED
900 lumens




Key Features

Dark grey
PC / ABS Material
Corrosion resistant
Suitable for use in coastal areas
Wall or ceiling mounted



trafalgar GU10 IP65

OD-TRA-B ■
OD-TRA-W □



Key Features

Sand black / Sand white
Aluminium / Glass
GU10 max. 10W



outdoor




outdoor



euston 230V

IPR-EUSSS

420 lumens

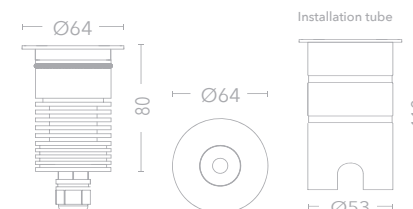

Key Features

Satin stainless steel Grade 316 /

Passivated aluminium body

2000kg drive over

6W CREE COB LED

Integral driver

Includes installation tube

Installation tube must be used for
drive over applications



COASTAL
>1KM



IP67



3000K



700mA



DRIVE OVER
2000kg

Key Features

Satin stainless steel Grade 316 cover /

Passivated aluminium body

3000K

3W CREE XPE Power LED

Driver supplied separately

Fittings must be wired in series

Dimmable when used with a dimmable driver

Installation tube must be used for drive over applications



IPR-PLOT4SS



IPR-PLOT3SS



IPR-PLOT2SS



IPR-PLOT1SS

Driver supplied separately, see pg. 217



IPR-PLOT4SS



IPR-PLOT1SS

4 way plot light

IPR-PLOT4SS
4 x 70° Beam

3 way plot light

IPR-PLOT3SS
3 x 70° Beam




2 way plot light

IPR-PLOT2SS
2 x 110° Beam

1 way plot light

IPR-PLOT1SS
1 x 110° Beam

Average 90 lumens

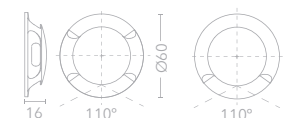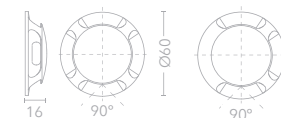



IPR-PICRSS



IPR-PICRSS

Driver supplied separately, see pg. 217



IPR-PADRSS15




IPR-PADRSS15

Driver supplied separately, see pg. 217



IPR-PADRSS30

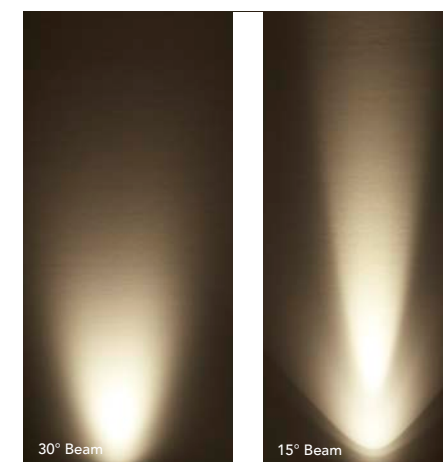


piccadilly IP67



IPR-PICRSS
220 lumens
20° beam



CUT OUT
36mm

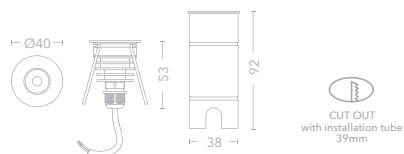

Key Features

Satin stainless steel Grade 316 top
/ Passivated aluminium body
3000K
3W CREE XPE Power LED
Driver supplied separately
Fittings must be wired in series
Dimmable when used with a
dimmable driver
Includes installation tube

paddington round IP67




IPR-PADRSS30
30° beam
IPR-PADRSS15
15° beam



CUT OUT
21mm



CUT OUT
with installation tube
26mm



Key Features

Satin stainless steel Grade 316
cover / Passivated aluminium body
3000K / 90 lumens
1W CREE XPE Power LED
Driver supplied separately
Fittings must be wired in series
Dimmable when used with a
dimmable driver
Includes installation tube

bathroom overview



69



slim trim IP65

70



glacier

71



zelda round

72



slim trim 2 FR

73

New



zara

74-75

New



slim 3

76-77

New



slim 3 trimless

78




zelda round trimless

79



zelda square trimless

80



slim trimless IP65

94-95



pyrenees IP65

98-99



marker lights

204-205



euston

208



piccadilly

209



paddington

45



peri 30cm

48



andaman 30cm / 40 cm

46-47



verve 30cm / 40cm

49



banda 23 cm / 35cm

214



acqua

161



venti/veritas

110-111



selene 3



203

trafalgar

bathroom




acqua

BA-M-ACQUA  

19W SMD LED

1330 lumens



Key Features

Frosted / Mirrored glass

3000K

Removable pull cord

Demister pad heats the centre of the mirror when the light source is on



All bathroom lighting installations must comply to the guidelines set out in Amendment 1 of the 17th edition of the IEE Wiring Regulations (BS7671). The bathroom is divided into zones, with prescribed minimum IP ratings for the light fittings in each zone.

IP rating = Ingress Protection rating.

zone 0

The area inside the bath or shower tray. Fittings must be rated at IPX7 or higher (protected against immersion in water).

zone 1

The area above the bath or shower up to a height of 2.25 metres. Fittings must be rated at IPX5 or higher (protected from jets of water).

zone 2

Covers an area 0.6 metres wide immediately next to, and all around Zone 1. The 60cm area around washbasins should also be treated as zone 2. The minimum rating is IPX4. If there is a likelihood of water jets being used for cleaning purposes in Zone 2, a minimum of IPX5 is required.

outside zone

Covers any area outside Zones 0, 1 and 2. There is no IP requirement in this zone. Bathrooms are allowed to contain a socket outlet, this must be located 3 metres outside Zone 1. Lighting circuits and any socket-outlet circuit in a room containing a bath and/or shower must be provided with 30mA RCD protection.

guide to constant current LEDs

Constant current LED items can be identified because the operating power is quoted in milliamps (mA). Project Collection constant current items are either 350mA or 700mA.

Do I need a separate driver?

Yes, choose a 350mA or 700mA driver to suit the number of fittings you want to run, and whether you want to dim the item. Fittings must be wired in series.

Is this dimmable?

Yes, if used with a dimmable 350mA driver and a compatible dimmer.


How do I work out which driver I need?

Identify the current, 350mA or 700mA.
Note the wattage of each item, e.g 1W, 3W

item wattage x no. of items = total wattage
select your driver to suit your requirements

How do I wire this?

In series. See the drivers listed below, the product fitting instructions or the drawing below

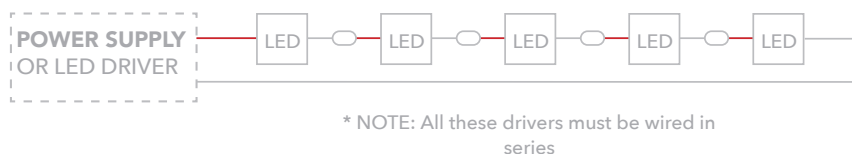

The driver doesn't fit through the hole / where do I put the driver?

Drivers should be sited somewhere you can access them for maintenance. This can be up to 60m away from the furthest fitting.

The driver will often be larger than the hole cut out for the item. Again, locate it in another place, where you can access it in the future if required

troubleshooting

The first fitting lights up, the others don't come on

You have wired this in parallel (not in series).
You will need to buy replacements for all but the first one.
These are not repairable.

All the fittings have failed

This is due to driver failure. Check that you have wired the circuit correctly, or the driver may fail again.

My fittings come on for a while, then they go off, and turn back on by themselves later

Your driver is overheating. Improve the air flow around it.

My fittings are all flashing

Either... Your circuit is wired in parallel. You will need to rectify the wiring and replace the driver. You may need to replace the fittings.
Or... This is a driver issue. Check your driver is not overrun or under-run (i.e. within the minimum and maximum wattages). Otherwise it is a faulty driver.

The first fitting in the circuit stays on after the circuit is turned off

You have residual current in the circuit, or current leakage. Try changing the switch. If these are on a circuit with an intermediate switch it is almost impossible to prevent a small amount of current leakage.

accessories

modules



MOD1WIP

1w IP65 350mA LED module

1W CREE XPE 350mA
Beam angle: 30°
95 lumens

MOD1WIP 3000K
MOD1WIP-2700 2700K



MOD1WIP230V

1w IP65 230V LED module

1W CREE XPE 350mA
Beam angle: 30°
95 lumens

MOD1WIP230 3000K
MOD1WIP230V-2700 2700K



MOD1W

1w 350mA LED module

1W CREE XPE 350mA
Beam angle: 30°
95 lumens

MOD1W 3000K
MOD1W-2700 2700K

suspensions



PA-VER-W

verve 2m suspension

PA-VER-B ■
PA-VER-W □



PA-HEY-B

hey-lo 2m suspension

PA-HEY-B ■
PA-HEY-W □

lamps



L10113-27


3w dimmable mini GU10 LED lamp

L10113-27 2700K (270 lumens)
L10113-3 3000K (285 lumens)
L10113-4 4000K (310 lumens)

What is a
mini GU10?



insulation guard



DL-IG01

insulation guard, pack of 10

DL-IG01



DL-IG02

insulation guard, pack of 10

DL-IG02

constant current drivers



MOD1WIP



DR350-18TD

Item no.	Current	Min. load	Max. load	TRIAC dimmable	IP Rating	Power factor	Dimensions L x W x H (mm)	Tails / Screw terminals
DR350-3	350mA	1W	3W	No	IP65	0.9	38 x 27 x 21	Tails
DR350-3TD	350mA	2W	3W	Yes	IP65	0.9	38 x 27 x 21	Tails
DR350-7	350mA	1W	7W	No	IP65	0.4	60 x 35 x 23	Tails
DR350-9TD	350mA	2W	9W	Yes	IP20	0.9	110 x 45 x 28	Screw terminals
DR350-18TD	350mA	10W	18W	Yes	IP20	0.9	165 x 52 x 25	Screw terminals
DR700-9	700mA	3W	9W	No	IP65	0.5	60 x 35 x 23	Tails
DR700-18TD	700mA	6W	18W	Yes	IP20	0.9	110 x 45 x 28	Screw terminals
DR700-36TD	700mA	20W	36W	Yes	IP20	0.9	165 x 52 x 25	Screw terminals

guide to symbols

						
EN	Class 1	Class 2	Class 3	Operating power	Dimmable	Switched
FR	Classe I	Classe II	Classe III	Alimentation	Dimmable	Avec interrupter
NL	Klasse 1	Klasse 2	Klasse 3	Vermogen	Dimbaar	Schakelaar
DE	Klasse 1	Klasse 1	Klasse 3	Betriebsleistung	Dimmbar	Schalterung
ES	Clase 1	Clase 2	Clase 3	Potencia	Regulable	Con interruptor
SW	Klass 1	Klass 2	Klass 3	driftkraft	Dimbar	Strömbrytare
HU	1-es osztály	2-es osztály	3-as osztály	Teljesítmény	Dimmelhető	Kapcsoló

						
EN	LED 1 CCT	LED 2 CCT	LED 3 CCT	USB Charging	Motion sensor	Anti-glare
FR	LED 1 CCT	LED 2 CCT	LED 3 CCT	Prise USB	Capteur de mouvement	Antireflet
NL	LED 1 CCT	LED 2 CCT	LED 3 CCT	"USB Oplader"	Bewegingssensor	Anti Slip
DE	LED 1 CCT	LED 2 CCT	LED 3 CCT	USB-Ladung	Bewegungsmelder	Blendschutz
ES	LED 1 CCT	LED 2 CCT	LED 3 CCT	Cargador USB	Sensor de movimiento	Antideslizante
SW	LED 1 CCT	LED 2 CCT	LED 3 CCT	USB laddning	Rörelsevak	Anti reflex
HU	LED 1 CCT	LED 2 CCT	LED 3 CCT	USB töltő	Mozgásérzékelő	Vakítósgátló

						
EN	IP Rating	Fire rated	Fingerprint resistant	Coastal use	Drive over	Walkover
FR	Classification IP	Resistant au feu	Résistance à l'empreinte digitale	Classification côtière/littoral	Rouler dessus	Marcher dessus
NL	IP Rating	Brandwerend	"Vingerafdruk-bestendig"	Kust bestendig	Overrijdbaar	Loopbaar
DE	IP-Bewertung	Brandschutzklasse	Fingerabdruck-resistent	Verwendung an der Küste	Überfahrbar	Begehbar
ES	Clasificación IP	Resistente al fuego	Resistente a las huellas dactilares	Uso costero	Transitable en coche	Transitable a pie
SW	IP Klass	Brandklassad	Resistent mot fingeravtryck	Kustnära användning	Överkörningsbar	Gångbar
HU	IP kategória	Tűzvédelmi besorolás	Ujjlenyomat-ellenálló	Vízpart menti használat	Terhelhető	Járható

						
EN	De-mister	Cut-out size	Minimum depth	Track compatible	New	Limited stock
FR	Système de Désembuage	Découpe	Profondeur Minimale	Rail compatible	Nouveauté	Stock limité
NL	Anti Condens	Inbouw maat	Minimale diepte	Gebruikbaar voor Track	Nieuw	Bepaalde voorraad
DE	Entmisterung	Ausschnittgröße	Minimale Tiefe	Kompatibel mit dem Gleis	Neu	begrenzter Bestand
ES	Anticondensación	Corte de empotramiento	Profundidad mínima	Via compatible	Nuevo	Stock limitado
SW	Anti im funktion	Håltagnings mått	Minsta djup	Avsedd för skena	Nyhet	Begränsat antal
HU	Páramentesítő	Kivágás mérete	Minimum süllyesztés	Sin kompatibilis	Új	Korlátozott készlet

guide to finishes

					
EN	Sand white	Matt White	Sand Black	Matt Black	Passivated Black
FR	Sable Blanc	Blanc Mat	Sable Noir	Noir Mat	Noir Passivé
NL	Zandkleur Wit	Mat Wit	Zandkleur Zwart	Mat Zwart	Passivated Zwart
DE	Sandweiß	Mattes Weiß	Sandschwarz	Mattschwarz	schwarz passiviert
ES	Blanco arena	Blanco mate	Negro arena	Negro mate	Negro pasivo
SW	Sand	Matt vit	Sand svart	Matt svart	passiveras svart
HU	Homokfehér	Matt fehér	Homokfekete	Matt fekete	Passzívt fekete

					
EN	Satin Nickel	Polished Chrome	Satin Stainless Steel	Antique Brass	Painted Gold
FR	Nickel Satiné	Chrome Poli	Inox Satiné	Cuivre Antique	Peint en Or
NL	Satijn Nikkel	Chroom Gepolijst	Satijn Roestvrij Staal	Antiek Messing	Goud Gelakt
DE	Satin-Nickel	Poliertes Chrom	Satinierter Edelstahl	Antikes Messing	Gold lackiert
ES	Niquel satinado	Cromo pulido	Acero inoxidable satinado	Bronce envejecido	Oro pintado
SW	Borstad stål	Blank krom	Rostfritt	Antik mässing	Guld
HU	Szatén nikkel	Króm	Szatén rozsdamentes acél	Antik bronz	Festett arany

					
EN	Gold Anodised*	Painted Bronze	Bronze Anodised*	Graphite	Dark Grey
FR	Or Anodisé	Peint en Bronze	Bronze Anodisé	Graphite	Gris Foncé
NL	Goud Geanodiseerd	Brons Gelakt	Brons Geanodiseerd	Grafiet	Donker Grijs
DE	Goldeloxiert	Lackierte Bronze	Bronze Eloxiert	Graphit	Dunkel Grau
ES	Oro Anodizado	Bronce pintado	Bronce Anodizado	Grafito	Gris oscuro
SW	Anodiserad guld	Brons	Anodiserad brons	Grafit	Mörk grå
HU	Anodizált arany	Festett bronz	Anodizált bronz	Grafit	Sötét szürke

		
EN	Coconut	Mushroom
FR	Noix de Coco	Champignon
NL	Coconut	Mushroom
DE	Kokosnuss-An	Pilz-Auf
ES	Coco	Champinon
SW	Coconut	Mushroom
HU	Kókusz fehér	Gomba barna

*Living finishes

Living finishes change over time. Anodised finishes may appear slightly darker after a period of 3 years due to continued oxidation of the surface of the product.

product code index

BA-M-ACQUA	212	DL-GRID2BB	64	EUFS-OLY-SN	171
BA-VEN90	161	DL-GRID2FRBB	65	EUTA-CIA-BZ	173
BA-VER90	161	DL-GRID2FRWB	65	EUTA-CIA-GO	173
CE-AND-B	57	DL-GRID2FRWW	65	EUTA-OLY-BZ	170
CE-ANN-B	55	DL-GRID2WW	64	EUTA-OLY-BZ-USB	170
CE-ANN-BZ	55	DL-IG01	217	EUTA-OLY-SN	170
CE-ANN-GO	55	DL-IG02	217	EUTA-OLY-SN-USB	170
CE-ANN-W	55	DL-MINW	67	FL-ADM30-W	48
CE-HEY60-B	33	DL-POLW	63	FL-ADM40-W	48
CE-HEY60-W	33	DL-SLIM2FRB	72	FL-BAN23-B	49
CE-HEY90-B	33	DL-SLIM2FRW	72	FL-BAN35-B	49
CE-HEY90-W	33	DL-SLIM3FRB	74	FL-ETE55-WS	34
CE-HONRB	59	DL-SLIM3FRBZ	74	FL-GRA30-B	51
CE-HONRW	59	DL-SLIM3FRW	74	FL-GRA30-GO	51
CE-HONSQB	59	DL-SLIMB	68	FL-GRA50-B	51
CE-HONSQW	59	DL-SLIMP3FRB	75	FL-GRA50-GO	51
CE-LINO2-B	42	DL-SLIMP3FRBZ	75	FL-SAT40-WS	44
CE-LINO2-W	42	DL-SLIMP3FRW	75	FL-SAT60-WS	44
CE-PER130	45, 201	DL-SLIMIPB	69	FS-CIA-BZ	172
CE-PER130	45	DL-SLIMIPW	69	FS-CIA-GO	172
CE-PRI35-B	36	DL-SLIMSQB	68	FS-OLY-BZ	171
CE-PRI35-GO	36	DL-SLIMW	68	FS-OLY-SN	171
CE-PRI45-B	36	DL-WASH	83	IPR-EUSSS	205
CE-PRI45-GO	36	DL-ZAR-W	73	IPR-HOLSS	98
CE-SWI-B	57	DL-ZELRB	71	IPR-HOLSSAG	99
CE-SWI-W	57	DL-ZELRW	71	IPR-HOXCP	98
CE-VER30-B	46	DR350-18TD	217	IPR-HOXSS	98
CE-VER30-W	46	DR350-3	217	IPR-PADRSS15	209
CE-VER40-B	46	DR350-7	217	IPR-PADRSS30	209
CE-VER40-W	46	DR350-9TD	217	IPR-PICRSS	208
DL-DIA-W	99	DR350-TD	217	IPR-PLOT1SS	207
DL-GLAR	70	DR700-18TD	217	IPR-PLOT2SS	207
DL-GRID1BB	64	DR700-36TD	217	IPR-PLOT3SS	207
DL-GRID1FRWB	65	DR700-9	217	IPR-PLOT4SS	207
DL-GRID1FRWW	65	EUFS-CIA-BZ	172	IPR-WRB	95
DL-GRID1WB	64	EUFS-CIA-GO	172	IPR-WRB27	95
DL-GRID1WW	64	EUFS-OLY-BZ	171	IPR-WRB-AC	95

IPR-WRW	95	PE-ADA100-B	27	PL-BLA27	92
IPR-WRW27	95	PE-ADA100-GO	27	PL-BLAGU10	91
IPR-WRW-AC	95	PE-ANN-B	54	PL-BOU	92
IRP-WRB27-AC	95	PE-ANN-BZ	54	PL-BOU27	92
IRP-WRW27-AC	95	PE-ANN-GO	54	PL-CADET	165
L10113-27	217	PE-ANN-W	54	PL-CONCO	166
L10113-3	217	PE-APO-B	58	PL-CONCS	167
L10113-4	217	PE-APO-W	58	PL-MINW	67
OD-BER2-G	193	PE-ARA100-B	25	PL-POLW	63
OD-CHIBA	196	PE-ARA100-BZ	25	PL-REN1	86
OD-CON-G	188	PE-ARA100-GO	25	PL-REN2	87
OD-CONP-G	188	PE-ARA100-W	25	PL-RENWW	87
OD-FARP	185	PE-ARA150-B	26	PL-ROM1	88
OD-FARR	185	PE-ARA150-BZ	26	PL-ROM2	88
OD-FPOLE	185	PE-ARA150-GO	26	PL-SAB1-B	82
OD-GRO230-G	187	PE-ARA150-W	26	PL-SAB1-W	82
OD-GRO280-G	187	PE-ARA60-B	24	PL-SAB2-B	82
OD-GRO30-G	186	PE-ARA60-BZ	24	PL-SAB2-W	82
OD-GRO80-G	186	PE-ARA60-GO	24	PL-SIMPL	90
OD-KOBM	202	PE-ARA60-W	24	PL-SLIM3FRB	76
OD-KYOS	202	PE-ART-B	58	PL-SLIM3FRW	76
OD-LAN-G	192	PE-ART-W	58	PL-SLIMB	81
OD-MAY-G	195	PE-COM2-BS	30	PL-SLIMP3FRB	77
OD-SAPL-GW	199	PE-COM2-WS	30	PL-SLIMP3FRW	77
OD-SAPS-GW	198	PE-ETE55-BS	35	PL-SLIMIPB	80
OD-SAV-G	190	PE-ETE55-WS	35	PL-SLIMIPW	80
OD-SAVP-G	191	PE-LAS6-W	52	PL-SLIMW	81
OD-STR-G	195	PE-ORB120-BS	29	PL-TROCA	89
OD-SUZ-GW	199	PE-ORB120-BZ	29	PL-ZELRB	78
OD-TOKYO	197	PE-ORB120-GO	29	PL-ZELRW	78
OD-TRA-B	203	PE-ORB120-WS	29	PL-ZELSQB	79
OD-TRA-W	203	PE-VIST-B	41	PL-ZELSQW	79
OD-YOK	200	PE-VISTR-B	39	RW-RUN-B	97
PA-HEY-B	218	PE-VISTR-W	39	RW-RUN-GO	97
PA-HEY-W	218	PE-VIST-W	41	RW-RUN-W	97
PA-VER-B	46	PL-AVRON	164	RW-STP-B	96
PA-VER-W	46	PL-BLA	92	RW-STP-GO	96

RW-STP-W	96	SP-ANN2-GO	114	SP-MOO3-W	108
SH-CO-C	178	SP-ANN3-BZ	114	SP-MOO4-B	109
SH-CO-M	178	SP-ANN3-GO	114	SP-MOO4-BZ	105
SH-DIF40	177	SP-ANN4-BZ	115	SP-MOO4-W	109
SH-DR15-C	177	SP-ANN4-GO	115	SP-MOOR-B	62
SH-DR15-M	177	SP-CIA1-BZ	116	SP-MOOR-W	62
SH-DR30-C	177	SP-CIA1-GO	116	SP-SEL3L-B	111
SH-DR30-G	177	SP-CIA3-BZ	117	SP-SEL3L-BZ	111
SH-DR30-M	177	SP-CIA3-GO	117	SP-SEL3L-W	111
SH-DR40-C	177	SP-CIA4-BZ	117	SP-SEL3R-B	110
SH-DR40-G	177	SP-CIA4-GO	117	SP-SEL3R-BZ	110
SH-DR40-M	177	SP-JUP1-B	119	SP-SEL3R-W	110
SH-P3-SN	179	SP-JUP1-W	119	TA-CIA-BZ	173
SH-RL-C	178	SP-JUP2-B	119	TA-CIA-GO	173
SH-RL-M	178	SP-JUP2-W	119	TA-OLY-BZ	170
SH-RS-C	178	SP-LAS15-B	146	TA-OLY-BZ-USB	170
SH-RS-M	178	SP-LAS15-W	146	TA-OLY-SN	170
SH-SF3-SN	179	SP-MOO1-B	107	TA-OLY-SN-USB	170
SH-VICLED-BZ	151	SP-MOO1-BZ	103	TR-1B	120
SH-VICLED-MB	151	SP-MOO1R-B	108	TR-1BZ	122
SH-VICLEDR-MB	151	SP-MOO1R-BZ	104	TR-1GO	122
SH-VICLED-SN	151	SP-MOO1R-W	108	TR-1W	120
SH-WBPIM2-BZ	142	SP-MOO1S-B	107	TR-2B	120
SH-WBPIM2-MB	142	SP-MOO1S-BZ	103	TR-2BZ	122
SH-WBPIM2R-BZ	143	SP-MOO1SUSB-B	107	TR-2GO	122
SH-WBPIM2R-MB	143	SP-MOO1SUSB-BZ	103	TR-2W	120
SH-WBPIM2R-SN	143	SP-MOO1SUSB-W	107	TR-AND-B	132
SH-WBPIM2-SN	142	SP-MOO1S-W	107	TR-AND-W	132
SH-WBVIC-BZ	144	SP-MOO1-W	107	TR-ANN-B	127
SH-WBVIC-MB	144	SP-MOO2-B	109	TR-ANN-BZ	127
SH-WBVICR-BZ	145	SP-MOO2-BZ	105	TR-ANN-GO	127
SH-WBVICR-MB	145	SP-MOO2-W	109	TR-ANN-W	127
SH-WBVICR-SN	145	SP-MOO3-B	108	TR-CC-B	121
SH-WBVIC-SN	144	SP-MOO3-BZ	104	TR-CC-BZ	123
SP-ANN1-BZ	113	SP-MOO3L-B	109	TR-CC-GO	123
SP-ANN1-GO	113	SP-MOO3L-BZ	105	TR-CC-W	121
SP-ANN2-BZ	114	SP-MOO3L-W	109	TR-EC-B	121

TR-EC-BZ	123	TR-T2-BZ	122	WL-MLW-W	150
TR-EC-GO	123	TR-T2-GO	122	WL-ODO20-W	163
TR-EC-W	121	TR-T2-W	120	WL-ODO30-W	163
TR-FC-B	121	TR-TAU-B	133	WL-SLO1N-B	157
TR-FC-W	121	TR-TAU-W	133	WL-SLO1N-W	157
TR-LAS-B	131	TR-TC-B	121	WL-SLO2-B	157
TR-LAS-W	131	TR-TC-W	121	WL-SLO2-W	157
TR-LC-B	121	TR-XC-B	121	WL-SOU24-B	156
TR-LC-BZ	123	TR-XC-W	121	WL-SOU24-W	156
TR-LC-GO	123	WL-ANN1-B	139	WL-SUN-B	137
TR-LC-W	121	WL-ANN1-BZ	139	WL-SUN-BZ	137
TR-LE-B	121	WL-ANN1-GO	139	WL-SUN-GO	137
TR-LE-BZ	123	WL-ANN1-W	139	WL-SUN-W	137
TR-LE-GO	123	WL-ANN2-B	139	WL-VAVS120	160
TR-LE-W	121	WL-ANN2-BZ	139	WL-VAVS60	160
TR-LIB-B	130	WL-ANN2-GO	139	WL-VAVS90	160
TR-LIB-BZ	130	WL-ANN2-W	139		
TR-LIB-WW	130	WL-ANNR-B	141		
TR-MJ-B	121	WL-ANNR-BZ	141		
TR-MJ-BZ	123	WL-ANNR-GO	141		
TR-MJ-GO	123	WL-BLF-B	148		
TR-MJ-W	121	WL-BLF-W	148		
TR-ORI2-B	129	WL-CIAR-BZ	149		
TR-ORI2-BZ	129	WL-CIAR-GO	149		
TR-ORI2-GO	129	WL-KIN-B	155		
TR-ORI2-W	129	WL-KIN-BZ	155		
TR-PEN-B	125	WL-KIN-GO	155		
TR-PEN-B	121	WL-LASR-B	147		
TR-PEN-W	125	WL-LASR-W	147		
TR-PEN-W	121	WL-LB10	159		
TR-SUS-B	121	WL-LB20	159		
TR-SUS-W	121	WL-LB38	159		
TR-T1-B	120	WL-MAR-B	152		
TR-T1-BZ	122	WL-MAR-BZ	153		
TR-T1-GO	122	WL-MAR-GO	153		
TR-T1-W	120	WL-MAR-SN	152		
TR-T2-B	120	WL-MLW-B	150		

product name index

acqua	212	grosvenor	186	runway	97
ada 100	27	grosvenor II	187	sablons	82
andaman	48	hey-lo	33	sapporo	198-199
andromeda ceiling	57	holborn	98-99	saturn	44
andromeda track	132	honos	59	savoy	190
anna ceiling	55	hoxton	98	savoy plus	191
anna pendant	54	jupiter	119	selene	110-111
anna reader	141	kings cross	155	shade suspensions	179
anna spot	113-115	kobe	202	simplon plaster	90
anna track	127	kyoto	202	slim 3 trimless	76-77
anna wall	139	lanesborough	192	slim trim	68-69
apollo	58	large rectangle	178	slim trim 2	72
ara 100	25	laser reader	147	slim trim 3	74-75
ara 150	26	laser spot	146	slim trimless	80-81
ara 60	24	laser suspension	52	sloane	157
artemis	58	laser track	131	small rectangle	178
avron	164	libra	130	southwark	156
banda	49	lino 2	42	steplight	96
berkeley	193	london bridge	159	strand adjustable	195
blackfriars	148	marlow usb	150	sunrise	137
blanche GU10	91	marylebone	152-153	suzuka slot	199
blanche LED	93	mayfair adjustable	195	swivel	57
boulogne	93	mini	67	taurus	133
cadet	165	moon recessed	62	tokyo	197
chiba duo	196	moon spotlights	102-109	track & accessories	120-125
ciara floor	172	odeon	163	trafalgar	203
ciara spot	116-117	olympia	170-171	trocadero	89
ciara table	173	orbit 120	29	vavin	160
ciara wall	149	orion 2	129	venti	161
compass	30	paddington	209	veritas	161
concorde	166-167	pendant track adapter	125	verve	46
cone	178	peri	45	victoria	144
connaught	188	peri 30cm	201	victoria LED	151
diana	99	piccadilly	208	victoria reader	145
drum shades	177	pimlico 2	142-143	vistina long	41
eternity	34 - 35	plot light	207	vistina round	39
euston	205	polo	63	wall washer	83
farringdon	184	prisma	36	yokohama	200
glacier	70	pyrenees IP65	95	zara	73
grace	51	renne	86-87	zelda round	71
grid	64-65	rome	88	zelda trimless	78-79

Additional information

Any typographical, clerical or other error or omission in any sales literature, quotation, price list, acceptance of offer, invoice or other document or information issued by the Company shall be subject to correction without any liability on the part of the Company. Goods supplied may vary in detail from the illustrations, drawings, measurements and descriptions set out in the Company's sales literature, which are approximate and for guidance only and will not form part of the Contract. Colour finishes will be maintained as accurately as possible but matching cannot be guaranteed. All terminology used in the Company's sales literature is, subject to these Conditions, that as understood by general usage in the trade. For full terms and conditions of sale consult your distributor.



Contact us (UK & Ireland):

info@projectcollection.co.uk

UK Headquarters and Showroom

Manchester: +44 (0) 161 203 3456

Searchlight Electric Ltd

Sidney House

900 Oldham Road, Manchester

M40 2BS, United Kingdom

Contact us (Europe and International):

international@searchlightelectric.com

Germany Office and Showroom

Sauerland: +49 6131 276 3003

Searchlight Electric Ltd

Lichthaus

Lucienstrasse 50

59757 Arnsberg, Germany

France

+33 (0) 78727237

Sweden

+46 (0) 70 680 40 50

Benelux

+31 (0) 621 806876

EUROPEAN REGISTERED OFFICE

Searchlight Electric International Ltd

The Black Church

St Mary's Place, Dublin 7

D07 P4AX, Ireland

WAREHOUSE EUROPE

Searchlight Electric / Clipper Logistics

UL Stachowska 16

Number 9

62-023 Robakowo, Poland

project

collection

www.projectcollection.co.uk

2026

+44 (0) 161 203 3456

info@projectcollection.co.uk

